

ROTEC[®]



Cut-off
wheels and brushes

786

Thin cut-off wheel for (stainless) steel, GOLD-LINE

ROTEC®



Execution: Cut-off wheels with patented helicoidal pattern on both sides of the wheel. This reduces friction and heat production which results in faster cuts and extremely long tool life.

| d ₁ | b | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|--------|----------|---------------|
| 115 | 1,3 | 22,2 | 25 | 786.1115 | 63,25 |
| 125 | 1,3 | 22,2 | 25 | 786.1125 | 68,67 |
| 115 | 1,6 | 22,2 | 25 | 786.2115 | 66,00 |
| 125 | 1,6 | 22,2 | 25 | 786.2125 | 67,00 |
| 180 | 2,0 | 22,2 | 25 | 786.3180 | 105,25 |
| 230 | 2,0 | 22,2 | 25 | 786.3230 | 142,50 |



Execution: Cut-off wheels with patented helicoidal pattern on both sides of the wheel. This reduces friction and heat production which results in faster cuts and extremely long tool life.
Only sold in full packs of 10 pcs each.

| d ₁ | b | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|--------|----------|--------------|
| 115 | 1,3 | 22,2 | 10 | 786.1116 | 23,91 |
| 125 | 1,3 | 22,2 | 10 | 786.1126 | 25,89 |

Large cut-off wheel for steel

ROTEC®



Execution: Cutting wheels for stationary cutting of solid bars, profiles and tubes with diameter up to 30/40 mm. They combine a long durability with an excellent cutting capacity thanks to their low thickness.

| d ₁ | b | d ₆ | ⊠ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|----|--------|----------|--------------|
| 300 | 4,0 | 20,0 | 25 | 1 | 786.3002 | 13,11 |
| 350 | 4,0 | 20,0 | 10 | 1 | 786.3502 | 14,20 |
| 350 | 4,0 | 25,4 | 10 | 1 | 786.3504 | 14,20 |

Thin cut-off wheel for aluminium

ROTEC®



Execution: Cut-off wheels with patented helicoidal pattern on both sides of the wheel. This reduces friction and heat production which results in faster cuts and extremely long tool life.

Application: For cutting/parting aluminium.

| d ₁ | b | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|--------|----------|--------------|
| 125 | 1,3 | 22,2 | 25 | 786.5125 | 67,00 |

789

Grinding wheel for steel

ROTEC®



Execution: Grinding wheels with high metal-removal rates at low operating pressures resulting in a comfortable operation with excellent results.

| d ₁ | b | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|--------|----------|--------------|
| 115 | 6,5 | 22,2 | 10 | 789.1115 | 35,90 |
| 125 | 6,5 | 22,2 | 10 | 789.1125 | 38,80 |
| 180 | 7,0 | 22,2 | 10 | 789.1180 | 70,51 |
| 230 | 7,0 | 22,2 | 10 | 789.1230 | 95,10 |

799

Cut-off wheel SILVER-LINE

ROTEC®



Execution: Economical cut-off wheel with an excellent price to quality ratio!

Application: Suitable for steel and stainless steel.

| d ₁ | b | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|--------|----------|--------------|
| 115 | 1,0 | 22,2 | 25 | 799.1010 | 38,25 |
| 125 | 1,0 | 22,2 | 25 | 799.1015 | 42,00 |
| 230 | 2,5 | 22,2 | 10 | 799.1030 | 35,75 |

799

Cut-off wheel OPTI-LINE, in cans

ROTEC®



Execution: Economical cut-off wheel with an excellent price to quality ratio!
Packed per 10 pieces in a handy can.

Application: Suitable for steel and stainless steel.

| d ₁ | b | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|--------|----------|--------------|
| 115 | 1,0 | 22,2 | 10 | 799.2001 | 14,04 |
| 125 | 1,0 | 22,2 | 10 | 799.2002 | 15,65 |

Cut-off wheel OPTI-LINE

ROTEC®



Execution: Economical cut-off wheel with an excellent price to quality ratio!

Application: Suitable for steel and stainless steel.

| d ₁ | b | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|-----|----------------|--------|----------|--------------|
| 115 | 1,0 | 22,2 | 25 | 799.2010 | 28,25 |
| 125 | 1,0 | 22,2 | 25 | 799.2015 | 30,25 |

796

Flap disc, conical, for (stainless) steel GOLD-LINE

ROTEC®




Execution: Flap discs with fibre glass backing pad and alumina zirconia cloth based flaps which result in redressing of the wheel during grinding. In such way the wheel remains aggressive and tool life is increased.

| d ₁ | Grit | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|------|----------------|--------|----------|--------------|
| 115 | 40 | 22,2 | 10 | 796.1152 | 37,80 |
| 115 | 60 | 22,2 | 10 | 796.1154 | 37,80 |
| 115 | 80 | 22,2 | 10 | 796.1156 | 37,80 |
| 125 | 40 | 22,2 | 10 | 796.1252 | 43,70 |
| 125 | 60 | 22,2 | 10 | 796.1254 | 43,70 |
| 125 | 80 | 22,2 | 10 | 796.1256 | 43,70 |

799

Flap disc SILVER-LINE

ROTEC®



Application: Metal

| d ₁ | Grit | d ₆ | pcs/PU | Item no. | € / PU |
|----------------|------|----------------|--------|----------|--------------|
| 115 | 40 | 22,2 | 10 | 799.0200 | 24,80 |
| 115 | 60 | 22,2 | 10 | 799.0205 | 21,40 |
| 115 | 80 | 22,2 | 10 | 799.0210 | 29,00 |
| 115 | 100 | 22,2 | 10 | 799.0215 | 29,80 |
| 115 | 120 | 22,2 | 10 | 799.0220 | 29,80 |
| 125 | 40 | 22,2 | 10 | 799.0225 | 31,80 |
| 125 | 60 | 22,2 | 10 | 799.0230 | 31,80 |
| 125 | 80 | 22,2 | 10 | 799.0235 | 32,60 |
| 125 | 100 | 22,2 | 10 | 799.0240 | 32,90 |
| 125 | 120 | 22,2 | 10 | 799.0245 | 33,60 |

739

Quick-Lock nut

ROTEC®



Execution: Fits all angle grinders up to ø230mm, regardless brand or model.

Application: For quickly and safely (de)mounting of cutting blades. Ideal for keyless working.

| Description | pcs/PU | Item no. | € / PU |
|----------------|--------|----------|--------------|
| Quick-Lock nut | 1 | 739.9002 | 30,03 |

798

Cup brush M14 - Twist knot wire, steel

ROTEC®



Execution: Cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: Aggressive brush for high-impact cleaning applications on large surfaces. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 65 | M14 | 0,50 | 12.500 | 1 | 798.0005 | 10,68 |
| 65 | M14 | 0,35 | 12.500 | 1 | 798.0010 | 12,22 |

Cup brush M14 - Twist knot wire, stainless steel

ROTEC®



Execution: Cup brush with high-grade stainless steel wire and M14 connection for direct mounting on angle grinders.

Application: Aggressive brush for high-impact cleaning applications on large surfaces. Ideal for removing welding slags, paint and oxidised surfaces of Cr-Ni-steels, including stainless steel.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 65 | M14 | 0,50 | 12.500 | 1 | 798.0015 | 17,45 |

Cup brush M14 - Twist knot wire, steel, with guard

ROTEC®



Execution: Cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders. Straight type with guard.

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.
When the wires have worn up to the guard, the guard can be removed and the remaining length of the wire can be used.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 65 | M14 | 0,50 | 12.500 | 1 | 798.0020 | 12,12 |
| 80 | M14 | 0,50 | 8.500 | 1 | 798.0025 | 20,12 |
| 100 | M14 | 0,50 | 8.500 | 1 | 798.0030 | 27,54 |
| 120 | M14 | 0,50 | 6.500 | 1 | 798.0035 | 33,81 |

Saucer cup brush M14 - Twist knot wire, steel

ROTEC®



Execution: Saucer cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 100 | M14 | 0,50 | 12.500 | 1 | 798.0040 | 11,72 |

Cup brush M14 - Crimped wire, steel

ROTEC®



Execution: Crimped wire cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: For light- to medium-duty brushing applications on flat or irregular surfaces and bevel buffing of low or unalloyed low-carbon steels. Easy to handle due its flexible wires.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 60 | M14 | 0,30 | 12.500 | 1 | 798.0100 | 9,41 |
| 75 | M14 | 0,30 | 12.500 | 1 | 798.0115 | 11,82 |
| 80 | M14 | 0,30 | 8.500 | 1 | 798.0120 | 13,23 |
| 100 | M14 | 0,30 | 8.500 | 1 | 798.0125 | 15,91 |

Cup brush M14 - Crimped wire, stainless steel



Execution: Crimped wire cup brush with high-grade stainless steel wire and M14 connection for direct mounting on angle grinders.

Application: For light- to medium-duty brushing applications on flat or irregular surfaces and bevel buffing of Cr-Ni-steels, including stainless steel. Easy to handle due its flexible wires.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 60 | M14 | 0,30 | 12.500 | 1 | 798.0105 | 17,58 |

Cup brush M14 - Crimped wire, brass



Execution: Crimped wire cup brush with brass wire and M14 connection for direct mounting on angle grinders.

Application: For light- to medium-duty brushing applications on flat or irregular surfaces and bevel buffing of copper, brass and bronze. Easy to handle due its flexible wires.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 60 | M14 | 0,30 | 12.500 | 1 | 798.0110 | 20,70 |

Saucer cup brush M14 - Crimped wire, steel




Execution: Saucer cup brush with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 100 | M14 | 0,30 | 12.500 | 1 | 798.0130 | 12,43 |

Wheel brush M14 - Twist knot wire, steel

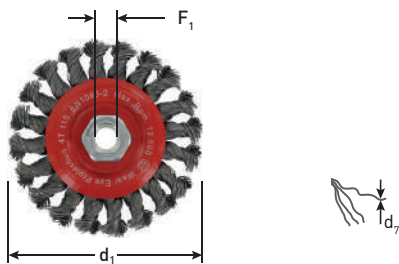


Execution: Twist knot wire wheel with hardened high-grade steel wire and M14 connection for direct mounting on angle grinders.
PS: With left-hand knotted wires for longer tool life!

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | F ₁ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 115 | M14 | 0,50 | 12.500 | 1 | 798.0200 | 13,36 |

Wheel brush 22,2mm - Twist knot wire, steel

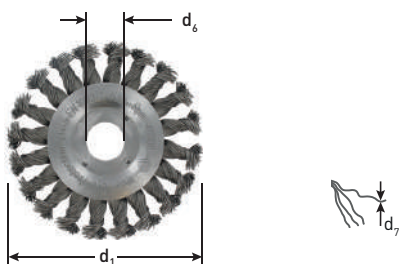


Execution: Twist knot wire wheel with high-grade stainless steel wire.
PS: With left-hand knotted wires for longer tool life!

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of low or unalloyed low-carbon steels.

| d ₁ | d ₆ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 115 | 22,2 | 0,50 | 12.500 | 1 | 798.0205 | 13,36 |
| 125 | 22,2 | 0,50 | 12.500 | 1 | 798.0215 | 13,53 |
| 180 | 22,2 | 0,50 | 9.000 | 1 | 798.0230 | 28,70 |

Wheel brush 22,2mm - Twist knot wire, stainless steel

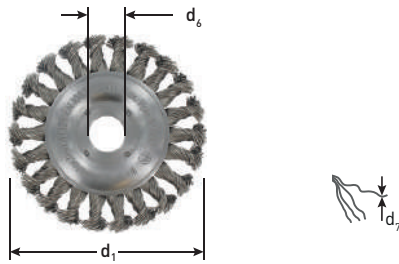


Execution: Twist knot wire wheel with high-grade stainless steel wire.

PS: With left-hand knotted wires for longer tool life!

Application: For heavy-duty cleaning of corners, recesses, and other hard-to-reach areas. Ideal for removing welding slags, paint and oxidised surfaces of Cr-Ni-steels, including stainless steel.

| d ₁ | d ₆ | d ₇ | Max. RPM | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|--------|----------|--------------|
| 115 | 22,2 | 0,50 | 12.500 | 1 | 798.0210 | 27,88 |
| 125 | 22,2 | 0,50 | 12.500 | 1 | 798.0220 | 28,63 |

Wheel brush w. shank 6mm - Crimped wire, steel

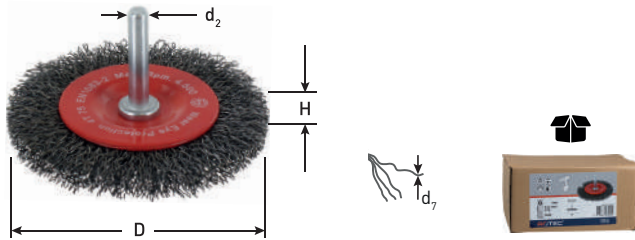


Execution: Crimped wire wheel brush with ø6mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with portable drills, drill presses and high-speed hand-held machines. For cleaning and deburring of low- or unalloyed low-carbon steels.

| D x H | d ₂ | d ₇ | Max. RPM | ☒ | pcs/PU | Item no. | € / PU |
|----------|----------------|----------------|----------|----|--------|----------|-------------|
| 50 x 8 | 6 | 0,30 | 4500 | 10 | 1 | 798.0310 | 3,15 |
| 75 x 10 | 6 | 0,30 | 4500 | 10 | 1 | 798.0315 | 4,26 |
| 75 x 15 | 6 | 0,30 | 4500 | 10 | 1 | 798.0320 | 7,54 |
| 100 x 12 | 6 | 0,30 | 4500 | 10 | 1 | 798.0345 | 4,61 |

Wheel brush w. shank 6mm - Crimped wire, brass

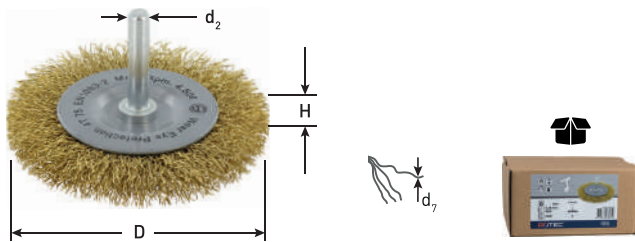


Execution: Crimped wire wheel brush with ø6mm shank and brass wire. Suitable for industrial use.

Application: Can be used with (cordless) portable drills and drill presses. For cleaning and deburring of copper, brass and bronze.

| D x H | d ₂ | d ₇ | Max. RPM | ☒ | pcs/PU | Item no. | € / PU |
|---------|----------------|----------------|----------|----|--------|----------|--------------|
| 75 x 10 | 6 | 0,30 | 4500 | 10 | 1 | 798.0330 | 10,74 |

Wheel brush w. shank 6mm - Crimped wire, stainless steel

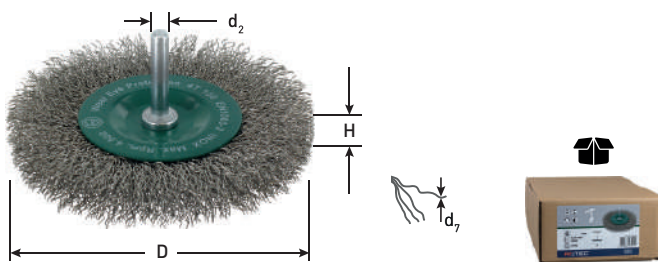


Execution: Crimped wire wheel brush with ø6mm shank and high-grade stainless steel wire. Suitable for industrial use.

Application: Can be used with (cordless) portable drills and drill presses. For cleaning and deburring of Cr-Ni-steels, including stainless steel.

| D x H | d ₂ | d ₇ | Max. RPM | ☒ | pcs/PU | Item no. | € / PU |
|----------|----------------|----------------|----------|----|--------|----------|--------------|
| 100 x 12 | 6 | 0,30 | 4500 | 10 | 1 | 798.0350 | 10,61 |

Straight cup brush w. shank 6mm - Crimped wire, steel

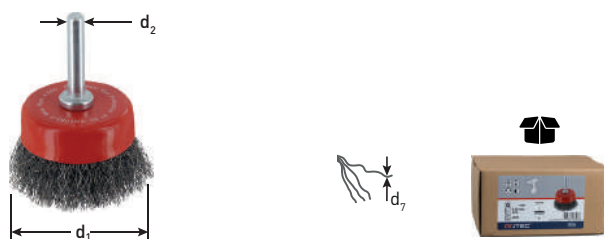

Execution: Crimped wire end brush with ø6mm shank and hardened high-grade steel wire. Straight model. Suitable for industrial use.

Application: Can be used with (cordless) portable drills, drill presses. For cleaning and deburring of low- or unalloyed low-carbon steels.

| d ₁ | d ₂ | d ₇ | Max. RPM | ☒ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 50 | 6 | 0,20 | 4500 | 10 | 1 | 798.0360 | 4,40 |

Cup brush w. shank 6mm - Crimped wire, brass



Execution: Crimped wire end brush with $\varnothing 6$ mm shank and high-grade brass wire. Straight model. Suitable for industrial use.

Application: Can be used with (cordless) portable drills, drill presses. For cleaning and deburring of copper, brass or bronze.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 50 | 6 | 0,20 | 4500 | 10 | 1 | 798.0365 | 8,31 |

Cup brush w. shank 6mm - Crimped wire, steel




Execution: Crimped wire cup brush with $\varnothing 6$ mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with (cordless) portable drills, drill presses. For cleaning and deburring of low- or unalloyed low-carbon steels.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 75 | 6 | 0,30 | 4500 | 10 | 1 | 798.0370 | 4,61 |

Wheel brush w. shank 6mm - Nylon



Execution: Nylon wheel brush with $\varnothing 6$ mm shank. Suitable for industrial use.

Application: Ideal for cleaning of paint residues on wood or metal, removing of light rust or temper colour of welding slags, cleaning of non-ferrous metals, grain structures of wood. Adapts ideally to the contours of the workpiece without hardly removing any of the workpiece material. Wear of the brush results in constant operating properties due to exposure of new grit.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|--------------|
| 100 | 6 | 1,2/ K80 | 4500 | 10 | 1 | 798.0400 | 14,40 |

Cup brush w. shank 6mm - Nylon



Execution: Nylon cup brush with $\varnothing 6$ mm shank. Suitable for industrial use.

Application: Ideal for cleaning of paint residues on wood or metal, removing of light rust or temper colour of welding slags, cleaning of non-ferrous metals, grain structures of wood. Adapts ideally to the contours of the workpiece without hardly removing any of the workpiece material. Wear of the brush results in constant operating properties due to exposure of new grit.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|--------------|
| 65 | 6 | 1,2/ K80 | 4500 | 10 | 1 | 798.0405 | 12,27 |

Wheel brush w. shank 6mm - Twist knot wire, steel




Execution: Crimped wire wheel brush with $\varnothing 6$ mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with portable drills, drill presses and high-speed hand-held machines. For cleaning and deburring of low- or unalloyed low-carbon steels.

| d ₁ | d ₂ | d ₇ | Max. RPM | | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 70 | 6 | 0,50 | 15000 | 10 | 1 | 798.0500 | 9,15 |

End brush w. shank 6mm - Crimped wire, steel

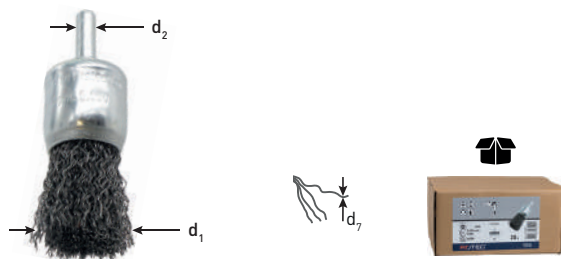


Execution: Crimped wire end brush with ø6mm shank and hardened high-grade steel wire. Suitable for industrial use.

Application: Can be used with portable drills, drill presses and high-speed hand-held machines. For cleaning and deburring of hard to access places and interiors of tubes, workpieces, slots etc. made of low- or unalloyed low-carbon steels.

| d ₁ | d ₂ | d ₇ | Max. RPM | ☼ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------|----|--------|----------|-------------|
| 22 | 6 | 0,30 | 6000 | 10 | 1 | 798.0600 | 4,53 |

Universal hand wire brush, steel

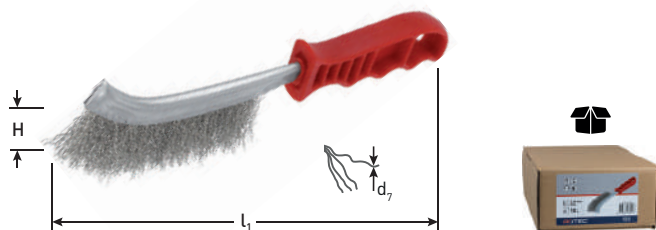

Execution: Plastic handle with single row brush made of hardened high-grade steel wire.

Application: Manual use, for removing of rust and deburring of low-alloyed or unalloyed low-carbon steels.

| l ₁ | H (mm) | d ₇ | ☼ | pcs/PU | Item no. | € / PU |
|----------------|--------|----------------|----|--------|----------|-------------|
| 265 | 28 | 0,30 | 10 | 1 | 798.0820 | 3,49 |

Universal hand wire brush, stainless steel




Execution: Plastic handle with single row brush made of high-grade stainless steel wire.

Application: Manual use, for removing of rust and deburring of Cr-Ni-steels including stainless steel.

| l ₁ | H (mm) | d ₇ | ☼ | pcs/PU | Item no. | € / PU |
|----------------|--------|----------------|----|--------|----------|-------------|
| 265 | 28 | 0,30 | 10 | 1 | 798.0825 | 4,28 |

Universal hand wire brush, brass

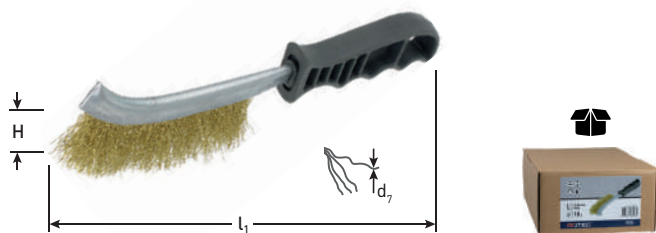


Execution: Plastic handle with single row brush made of high-grade brass wire.

Application: Manual use, for removing of rust and deburring of copper, brass and bronze.


| l ₁ | H (mm) | d ₇ | ☼ | pcs/PU | Item no. | € / PU |
|----------------|--------|----------------|----|--------|----------|-------------|
| 265 | 28 | 0,30 | 10 | 1 | 798.0830 | 5,43 |



Wire brush - steel wire

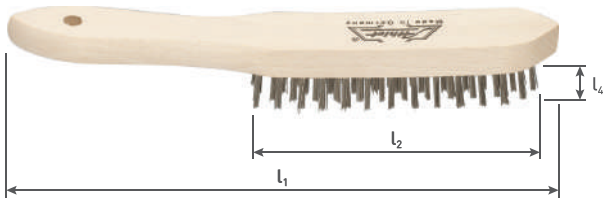

106100




Execution: Wooden wire brush with hardened high-grade 0.35mm steel wire.


Application: Manual use, for removing of rust and deburring of low-alloyed or unalloyed low-carbon steels.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | € / PU |
|-------|-------|-------|-------|-----|--------|--------------|-------------|
| 140 | 280 | 25 | 0,35 | 2 | 12 | 14.106100.02 | 3,83 |
| 140 | 280 | 25 | 0,35 | 3 | 12 | 798.0900 | 3,60 |
| 140 | 280 | 25 | 0,35 | 4 | 12 | 798.0905 | 3,81 |
| 140 | 280 | 25 | 0,35 | 5 | 12 | 798.0910 | 3,96 |
| 140 | 280 | 25 | 0,35 | 6 | 12 | 798.0915 | 4,30 |

Wire brush - brass steel wire

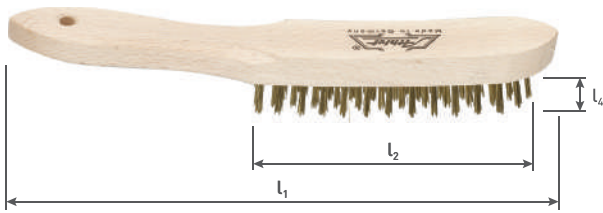

106102




Execution: Wooden wire brush with 0.4mm brass-plated, high-grade, high-tensile strength steel wire.


Application: Manual use, for removing of rust and deburring of copper, brass and bronze.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | € / PU |
|-------|-------|-------|-------|-----|--------|--------------|-------------|
| 140 | 280 | 22 | 0,4 | 3 | 12 | 14.106102.03 | 3,61 |
| 140 | 280 | 22 | 0,4 | 4 | 12 | 14.106102.04 | 3,53 |
| 140 | 280 | 22 | 0,4 | 5 | 12 | 14.106102.05 | 3,66 |
| 140 | 280 | 22 | 0,4 | 6 | 12 | 14.106102.06 | 4,17 |

Wire brush - stainless steel wire

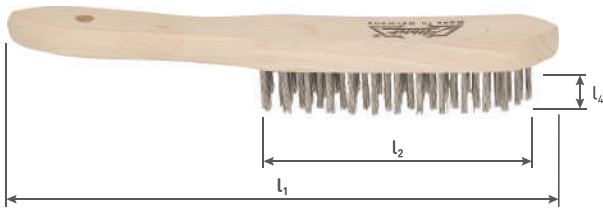

106105




Execution: Wooden wire brush with hardened high-grade 0.3mm stainless steel wire.


Application: Manual use, for removing of rust and deburring of Cr-Ni-steels including stainless steel.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | € / PU |
|-------|-------|-------|-------|-----|--------|----------|-------------|
| 140 | 280 | 22 | 0,3 | 3 | 12 | 798.0925 | 5,74 |
| 140 | 280 | 22 | 0,3 | 4 | 12 | 798.0930 | 6,15 |
| 140 | 280 | 22 | 0,3 | 5 | 12 | 798.0935 | 6,69 |

Wire brush - brass wire

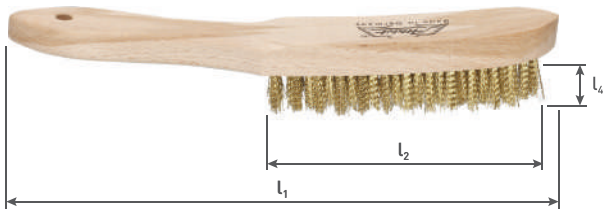

106106



Execution: Wooden wire brush with 0.25mm crimped high-quality high-density brass wire.

Application: Manual use, for removing of rust and deburring of copper, brass and bronze.

| l_2 | l_1 | l_4 | d_7 | r | pcs/PU | Item no. | € / PU |
|-------|-------|-------|-------|-----|--------|----------|-------------|
| 140 | 280 | 20 | 0,25 | 4 | 12 | 798.0920 | 8,15 |

File brush



Execution: Wooden file brush with scraper band trim with hardened high-grade 0.35mm steel wire.

Application: Manual use, for filing and cleaning of low-alloyed or unalloyed low-carbon steels.

| l ₂ | l ₁ | l ₄ | d ₇ | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------------|--------|----------|-------------|
| 110 | 250 | 8 | 0,35 | 12 | 798.0955 | 7,69 |

106120



Welt seam brush



Execution: Wooden welt seam brush with 0.35mm hardened smooth high-grade steel wire in V-shaped tapered fill.


Application: Manual use, for filing and cleaning of low-alloyed or unalloyed low-carbon steels.

| l ₂ | l ₁ | l ₄ | d ₇ | r | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------------|---|--------|--------------|-------------|
| 140 | 280 | 35 | 0,35 | 3 | 12 | 14.106125.00 | 8,80 |

106125



Fine scratch brush

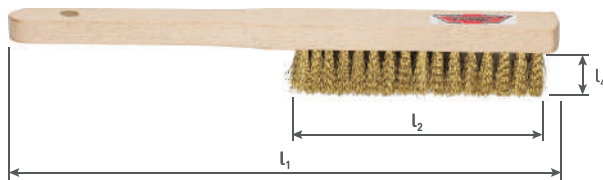

Execution: Wooden wire brush with 0.2mm crimped high-quality high-density brass wire.


Application: Manual use, for removing of rust and deburring of low-alloyed or unalloyed low-carbon steels, copper, brass and bronze.

| l ₂ | l ₁ | l ₄ | d ₇ | r | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------------|---|--------|--------------|--------------|
| 105 | 220 | 17 | 0,2 | 4 | 12 | 14.106130.00 | 10,29 |

106130



Spark plug brush

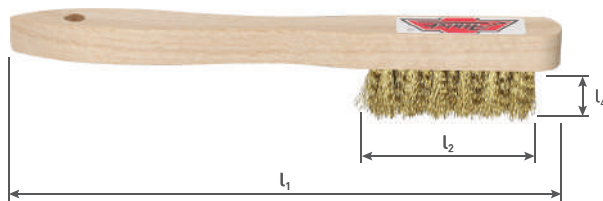

Execution: Wooden spark plug brush with 0.15mm crimped high-quality high-density brass wire.

Application: Manual use, especially for brushing and cleaning spark plugs. Also suitable for low-alloyed or unalloyed low-carbon steels, copper, brass and bronze.

| l ₂ | l ₁ | l ₄ | d ₇ | r | pcs/PU | Item no. | € / PU |
|----------------|----------------|----------------|----------------|---|--------|----------|-------------|
| 40 | 220 | 15 | 0,15 | 3 | 12 | 798.0960 | 4,56 |

106145

