

ROTEC®



Screwdriving
tools

Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips).



Type	l ₁	pcs/PU	Item no.	€ / PU
PH 0	25	2	800.00002	1,56
PH 1	25	2	800.00012	1,56
PH 2	25	2	800.00022	1,56
PH 3	25	2	800.00032	1,56
PH 0	25	10	800.00000	5,70
PH 1	25	10	800.00001	5,70
PH 2	25	10	800.00002	5,70
PH 3	25	10	800.00003	5,70
PH 1	25	50	800.00015	25,95
PH 2	25	50	800.00025	25,95



Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with reduced tip.

Application: Ideal for screws for gypsum boards or so called trumpet screws.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 2R	25	2	800.00052	1,66
PH 2R	25	10	800.00005	6,25



Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with reduced tip, with TiN-coating.

Application: Ideal for screws for gypsum boards or so called trumpet screws.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 2R	25	2	800.00062	3,27
PH 2R	25	10	800.00006	14,25



Execution: Screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile PH (Phillips), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1 *	25	2	800.10012	5,09
PH 2 *	25	2	800.10022	5,09
PH 1 *	25	10	800.10001	23,35
PH 2 *	25	10	800.10002	23,35
PH 3 *	25	10	800.10003	23,35

* Phase-out item, available until stock has depleted



Execution: Screwdriving bit 'Inox+' with C6.3 bit connection, profile PH (Phillips), high-alloy stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.


Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	25	2	800.11012	5,50
PH 2	25	2	800.11022	5,50
PH 3	25	2	800.11032	5,50
PH 1	25	10	800.1101	24,95
PH 2	25	10	800.1102	24,95
PH 3	25	10	800.1103	24,95



Execution: Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	25	2	800.20012	3,94
PH 2	25	2	800.20022	3,94
PH 3	25	2	800.20032	3,94
PH 1	25	10	800.2001	17,65
PH 2	25	10	800.2002	17,65
PH 3	25	10	800.2003	17,65



Execution: Screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PH (Phillips).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	25	2	800.30012	7,17
PH 2	25	2	800.30022	7,17
PH 3	25	2	800.30032	7,17
PH 1	25	10	800.3001	33,76
PH 2	25	10	800.3002	33,76
PH 3	25	10	800.3003	33,76



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PH (Phillips).

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	25	2	801.00012	3,16
PH 2	25	2	801.00022	3,16
PH 3	25	2	801.00032	3,16
PH 1	25	10	801.00001	13,71
PH 2	25	10	801.00002	13,71
PH 3	25	10	801.00003	13,71



Execution: Torsion screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile PH (Phillips), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1 *	25	2	801.10012	7,10
PH 2 *	25	2	801.10022	7,10
PH 3 *	25	2	801.10032	7,10
PH 1 *	25	10	801.10001	33,44
PH 2 *	25	10	801.10002	33,44
PH 3 *	25	10	801.10003	33,44

* Phase-out item, available until stock has depleted



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PH (Phillips), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	25	2	801.20012	6,01
PH 2	25	2	801.20022	6,01
PH 3	25	2	801.20032	6,01
PH 1	25	10	801.20001	27,96
PH 2	25	10	801.20002	27,96
PH 3	25	10	801.20003	27,96



Execution: Torsion screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PH (Phillips).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	25	2	801.30012	8,15
PH 2	25	2	801.30022	8,15
PH 3	25	2	801.30032	8,15
PH 1	25	10	801.30001	38,70
PH 2	25	10	801.30002	38,70
PH 3	25	10	801.30003	38,70



Execution: Screwdriving bit with E6.3 bit connection, profile PH (Phillips).


Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	50	2	802.00012	3,07
PH 2	50	2	802.00022	3,07
PH 3	50	2	802.00032	3,07
PH 1	70	1	802.00041	2,51
PH 2	70	1	802.00051	2,51
PH 3	70	1	802.00061	2,51
PH 1	89	1	802.00071	3,06
PH 2	89	1	802.00081	3,06
PH 3	89	1	802.00091	3,06
PH 1	110	1	802.00101	5,02
PH 2	110	1	802.00111	5,02
PH 3	110	1	802.00121	5,02
PH 1	127	1	802.00131	5,42
PH 2	127	1	802.00141	5,42
PH 3	127	1	802.00151	5,42
PH 1	152	1	802.00161	6,86
PH 2	152	1	802.00171	6,86
PH 3	152	1	802.00181	6,86

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	50	10	802.0001	13,26
PH 2	50	10	802.0002	13,26
PH 3	50	10	802.0003	13,26
PH 1	70	10	802.0004	20,50
PH 2	70	10	802.0005	20,50
PH 3	70	10	802.0006	20,50
PH 1	89	10	802.0007	25,86
PH 2	89	10	802.0008	25,86
PH 3	89	10	802.0009	25,86
PH 1	110	10	802.0010	44,94
PH 2	110	10	802.0011	44,94
PH 3	110	10	802.0012	44,94
PH 1	127	10	802.0013	48,34
PH 2	127	10	802.0014	48,34
PH 3	127	10	802.0015	48,34
PH 1	152	10	802.0016	62,59
PH 2	152	10	802.0017	62,59
PH 3	152	10	802.0018	62,59

Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv).



Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	803.00012	1,56
PZ 2	25	2	803.00022	1,56
PZ 3	25	2	803.00032	1,56
PZ 1	25	10	803.0001	5,70
PZ 2	25	10	803.0002	5,70
PZ 3	25	10	803.0003	5,70
PZ 1	25	50	803.00015	25,95
PZ 2	25	50	803.00025	25,95
PZ 3	25	50	803.00035	25,95




Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with reduced tip.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 2R	25	2	803.00052	2,06
PZ 2R	25	10	803.0005	8,23



Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with reduced tip, with TiN-coating.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 2R	25	2	803.00062	3,44
PZ 2R	25	10	803.0006	15,79



Execution: Screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile PZ (Pozidriv), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1 *	25	2	803.10012	4,78
PZ 2 *	25	2	803.10022	4,78
PZ 3 *	25	2	803.10032	4,78
PZ 1 *	25	10	803.1001	21,81
PZ 2 *	25	10	803.1002	21,81
PZ 3 *	25	10	803.1003	21,81

* Phase-out item, available until stock has depleted



Execution: Screwdriving bit 'Inox+' with C6.3 bit connection, profile PZ (Pozidriv), high-alloy stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	803.11012	5,50
PZ 2	25	2	803.11022	5,50
PZ 3	25	2	803.11032	5,50
PZ 1	25	10	803.1101	24,95
PZ 2	25	10	803.1102	24,95
PZ 3	25	10	803.1103	24,95



Execution: Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	803.20012	4,93
PZ 2	25	2	803.20022	4,93
PZ 3	25	2	803.20032	4,93
PZ 1	25	10	803.2001	22,58
PZ 2	25	10	803.2002	22,58
PZ 3	25	10	803.2003	22,58



Execution: Screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PZ (Pozidriv).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	803.30012	7,17
PZ 2	25	2	803.30022	7,17
PZ 3	25	2	803.30032	7,17
PZ 1	25	10	803.3001	33,76
PZ 2	25	10	803.3002	33,76
PZ 3	25	10	803.3003	33,76

804

Torsion screwdriving bit PZ, C6.3



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv).

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	804.00012	2,69
PZ 2	25	2	804.00022	2,69
PZ 3	25	2	804.00032	2,69
PZ 1	25	10	804.0001	11,40
PZ 2	25	10	804.0002	11,40
PZ 3	25	10	804.0003	11,40




Execution: Torsion screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile PZ (Pozidriv), stainless steel.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1 *	25	2	804.10012	5,88
PZ 3 *	25	2	804.10032	5,88
PZ 2 *	25	10	804.1002	27,29
PZ 3 *	25	10	804.1003	27,29


* Phase-out item, available until stock has depleted



Execution: Torsion screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with TiN-coating.

Application: Ideal for automated production lines and in combination with power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	804.20012	6,01
PZ 2	25	2	804.20022	6,01
PZ 3	25	2	804.20032	6,01
PZ 1	25	10	804.2001	27,96
PZ 2	25	10	804.2002	27,96
PZ 3	25	10	804.2003	27,96



Execution: Torsion screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile PZ (Pozidriv).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	804.30012	8,00
PZ 2	25	2	804.30022	8,00
PZ 3	25	2	804.30032	8,00
PZ 1	25	10	804.3001	37,93
PZ 2	25	10	804.3002	37,93
PZ 3	25	10	804.3003	37,93

805

Screwdriving bit PZ, E6.3



Execution: Screwdriving bit with E6.3 bit connection, profile PZ (Pozidriv).

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	50	2	805.00012	3,07
PZ 2	50	2	805.00022	3,07
PZ 3	50	2	805.00032	3,07
PZ 1	70	1	805.00041	2,52
PZ 2	70	1	805.00051	2,52
PZ 3	70	1	805.00061	2,52
PZ 1	89	1	805.00071	3,07
PZ 2	89	1	805.00081	3,07
PZ 3	89	1	805.00091	3,07
PZ 1	110	1	805.00101	5,02
PZ 2	110	1	805.00111	5,02
PZ 3	110	1	805.00121	5,02
PZ 1	127	1	805.00131	5,45
PZ 2	127	1	805.00141	5,45
PZ 3	127	1	805.00151	5,45
PZ 1	152	1	805.00161	7,16
PZ 2	152	1	805.00171	7,16
PZ 3	152	1	805.00181	7,16

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	50	10	805.0001	13,26
PZ 2	50	10	805.0002	13,26
PZ 3	50	10	805.0003	13,26
PZ 1	70	10	805.0004	20,61
PZ 2	70	10	805.0005	20,61
PZ 3	70	10	805.0006	20,61
PZ 1	89	10	805.0007	25,98
PZ 2	89	10	805.0008	25,98
PZ 3	89	10	805.0009	25,98
PZ 1	110	10	805.0010	44,94
PZ 2	110	10	805.0011	44,94
PZ 3	110	10	805.0012	44,94
PZ 1	127	10	805.0013	48,67
PZ 2	127	10	805.0014	48,67
PZ 3	127	10	805.0015	48,67
PZ 1	152	10	805.0016	65,55
PZ 2	152	10	805.0017	65,55
PZ 3	152	10	805.0018	65,55



Execution: Screwdriving bit with C6.3 bit connection, profile T (Torx).

Type	l ₁	pcs/PU	Item no.	€ / PU
T 5	25	2	806.00052	2,91
T 6	25	2	806.00062	2,91
T 7	25	2	806.00072	2,91
T 8	25	2	806.00082	2,91
T 9	25	2	806.00092	2,91
T 10	25	2	806.00102	2,67
T 15	25	2	806.00152	2,67
T 20	25	2	806.00202	2,67
T 25	25	2	806.00252	2,67
T 27	25	2	806.00272	2,67
T 30	25	2	806.00302	2,67
T 40	25	2	806.00402	2,67
T 45	25	2	806.00452	8,37
T 50	25	2	806.00502	8,94
T 55	25	2	806.00552	9,40
<hr/>				
T 5	25	10	806.0005	12,50
T 6	25	10	806.0006	12,50
T 7	25	10	806.0007	12,50

Type	l ₁	pcs/PU	Item no.	€ / PU
T 8	25	10	806.0008	12,50
T 9	25	10	806.0009	12,50
T 10	25	10	806.0010	11,29
T 15	25	10	806.0015	11,29
T 20	25	10	806.0020	11,29
T 25	25	10	806.0025	11,29
T 27	25	10	806.0027	11,29
T 30	25	10	806.0030	11,29
T 40	25	10	806.0040	11,29
T 45	25	10	806.0045	39,79
T 50	25	10	806.0050	42,64
T 55	25	10	806.0055	44,94
<hr/>				
T 10	25	50	806.00105	51,48
T 15	25	50	806.00155	51,48
T 20	25	50	806.00205	51,48
T 25	25	50	806.00255	51,48
T 30	25	50	806.00305	51,48



Inox+



Execution: Screwdriving bit 'Inox+' with C6.3 bit connection, profile T (Torx), high-alloy stainless steel.
Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	2	806.11102	6,50
T 15	25	2	806.11152	6,50
T 20	25	2	806.11202	6,50
T 25	25	2	806.11252	6,50
T 30	25	2	806.11302	6,50
T 40	25	2	806.11402	6,50

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	10	806.1110	29,50
T 15	25	10	806.1115	29,50
T 20	25	10	806.1120	29,50
T 25	25	10	806.1125	29,50
T 30	25	10	806.1130	29,50
T 40	25	10	806.1140	29,50



Execution: Screwdriving bit with C6.3 bit connection, profile T (Torx), with TiN-coating.
Application: Ideal for automated production lines and in combination with power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 5	25	2	806.20052	5,30
T 6	25	2	806.20062	5,30
T 8	25	2	806.20082	5,30
T 9	25	2	806.20092	5,30
T 10	25	2	806.20102	5,09
T 15	25	2	806.20152	5,09
T 20	25	2	806.20202	5,09
T 25	25	2	806.20252	5,09
T 30	25	2	806.20302	5,09
T 40	25	2	806.20402	5,09

Type	l ₁	pcs/PU	Item no.	€ / PU
T 5	25	10	806.2005	24,44
T 6	25	10	806.2006	24,44
T 8	25	10	806.2008	24,44
T 9	25	10	806.2009	24,44
T 10	25	10	806.2010	23,35
T 15	25	10	806.2015	23,35
T 20	25	10	806.2020	23,35
T 25	25	10	806.2025	23,35
T 30	25	10	806.2030	23,35
T 40	25	10	806.2040	23,35



Execution: Screwdriving bit 'DIAMONDgrip' with C6.3 bit connection, profile T (Torx).

Application: Special DIAMOND-coating results in very long and reliable tool life which makes this bit ideal for the most heavy-duty industrial applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	2	806.30102	8,00
T 15	25	2	806.30152	8,00
T 20	25	2	806.30202	8,00
T 25	25	2	806.30252	8,00
T 30	25	2	806.30302	8,00
T 40	25	2	806.30402	8,00

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	10	806.3010	37,93
T 15	25	10	806.3015	37,93
T 20	25	10	806.3020	37,93
T 25	25	10	806.3025	37,93
T 30	25	10	806.3030	37,93
T 40	25	10	806.3040	37,93

Screwdriving bit T-T, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile T-T (Torx Tamper).

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 T	25	2	806.70102	4,21
T 15 T	25	2	806.70152	4,21
T 20 T	25	2	806.70202	4,21
T 25 T	25	2	806.70252	4,21
T 27 T	25	2	806.70272	4,21
T 30 T	25	2	806.70302	4,21
T 40 T	25	2	806.70402	4,21

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 T	25	10	806.7010	19,94
T 15 T	25	10	806.7015	19,94
T 20 T	25	10	806.7020	19,94
T 25 T	25	10	806.7025	19,94
T 27 T	25	10	806.7027	19,94
T 30 T	25	10	806.7030	19,94
T 40 T	25	10	806.7040	19,94

Screwdriving bit T-S, C6.3




Execution: Screwdriving bit with C6.3 bit connection, profile T-S (Torx with pin).

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 S	25	2	806.80102	4,63
T 15 S	25	2	806.80152	4,63
T 20 S	25	2	806.80202	4,63
T 25 S	25	2	806.80252	4,63
T 27 S	25	2	806.80272	4,63
T 30 S	25	2	806.80302	4,63
T 40 S	25	2	806.80402	4,63

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 S	25	10	806.8010	21,93
T 15 S	25	10	806.8015	21,93
T 20 S	25	10	806.8020	21,63
T 25 S	25	10	806.8025	21,93
T 27 S	25	10	806.8027	21,93
T 30 S	25	10	806.8030	21,93
T 40 S	25	10	806.8040	21,93



Torsion-screwdriving bit T, C6.3, 3° tapered



Execution: Torsion screwdriving bit with C6.3 bit connection, profile T (Torx). 3° Tapered for anti-cam-out effect.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	2	807.00102	4,95
T 15	25	2	807.00152	4,95
T 20	25	2	807.00202	4,95
T 25	25	2	807.00252	4,95
T 30	25	2	807.00302	4,95
T 40	25	2	807.00402	4,95

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	10	807.0010	22,69
T 15	25	10	807.0015	22,69
T 20	25	10	807.0020	22,69
T 25	25	10	807.0025	22,69
T 30	25	10	807.0030	22,69
T 40	25	10	807.0040	22,69





Execution: Torsion screwdriving bit 'Anti-Cor' with C6.3 bit connection, profile T (Torx), stainless steel. 3° Tapered for anti-cam-out effect.

Application: Especially for fixing stainless steel screws in, for example, facade cladding. Prevents rust formation in the screw head and unattractive rust marks on the material.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 *	25	2	807.10102	8,15
T 15 *	25	2	807.10152	8,15
T 25 *	25	2	807.10252	8,15
T 30 *	25	2	807.10302	8,15
T 40 *	25	2	807.10402	8,15

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 *	25	10	807.1010	38,70
T 15 *	25	10	807.1015	38,70
T 25 *	25	10	807.1025	38,70
T 30 *	25	10	807.1030	38,70
T 40 *	25	10	807.1040	38,70

* Phase-out item, available until stock has depleted



Execution: Torsion screwdriving bit with C6.3 bit connection, profile T (Torx), with TiN-coating. 3° Tapered for anti-cam-out effect.

Application: Ideal for automated production lines and in combination with power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	2	807.20102	7,10
T 15	25	2	807.20152	7,10
T 20	25	2	807.20202	7,10
T 25	25	2	807.20252	7,10
T 30	25	2	807.20302	7,10
T 40	25	2	807.20402	7,10

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	10	807.2010	33,44
T 15	25	10	807.2015	33,44
T 20	25	10	807.2020	33,44
T 25	25	10	807.2025	33,44
T 30	25	10	807.2030	33,44
T 40	25	10	807.2040	33,44

Execution: Screwdriving bit with E6.3 bit connection, profile T (Torx).



Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	50	2	808.00102	6,49
T 15	50	2	808.00152	6,49
T 20	50	2	808.00202	6,49
T 25	50	2	808.00252	6,49
T 27	50	2	808.00272	6,49
T 30	50	2	808.00302	6,49
T 40	50	2	808.00402	6,49
T 10	70	1	808.10101	5,11
T 15	70	1	808.10151	5,11
T 20	70	1	808.10201	5,11
T 25	70	1	808.10251	5,11
T 27	70	1	808.10271	5,11
T 30	70	1	808.10301	5,11
T 40	70	1	808.10401	5,11
T 10	89	1	808.20101	5,14
T 15	89	1	808.20151	5,14
T 20	89	1	808.20201	5,14
T 25	89	1	808.20251	5,14
T 27	89	1	808.20271	5,14
T 30	89	1	808.20301	5,14
T 40	89	1	808.20401	5,14
T 10	110	1	808.30101	5,26
T 15	110	1	808.30151	5,26
T 20	110	1	808.30201	5,26
T 25	110	1	808.30251	5,26
T 27	110	1	808.30271	5,26
T 30	110	1	808.30301	5,26
T 40	110	1	808.30401	5,26
T 10	127	1	808.40101	7,29
T 15	127	1	808.40151	7,29
T 20	127	1	808.40201	7,29
T 25	127	1	808.40251	7,29
T 27	127	1	808.40271	7,29
T 30	127	1	808.40301	7,29
T 40	127	1	808.40401	7,29
T 10	152	1	808.50101	8,51
T 15	152	1	808.50151	8,51
T 20	152	1	808.50201	8,51
T 25	152	1	808.50251	8,51
T 27	152	1	808.50271	8,51
T 30	152	1	808.50301	8,51
T 40	152	1	808.50401	8,51

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	50	10	808.0010	30,37
T 15	50	10	808.0015	30,37
T 20	50	10	808.0020	30,37
T 25	50	10	808.0025	30,37
T 27	50	10	808.0027	30,37
T 30	50	10	808.0030	30,37
T 40	50	10	808.0040	30,37
T 10	70	10	808.1010	46,48
T 15	70	10	808.1015	46,48
T 20	70	10	808.1020	46,48
T 25	70	10	808.1025	46,48
T 27	70	10	808.1027	46,48
T 30	70	10	808.1030	46,48
T 40	70	10	808.1040	46,48
T 10	89	10	808.2010	46,70
T 15	89	10	808.2015	46,70
T 20	89	10	808.2020	46,70
T 25	89	10	808.2025	46,70
T 27	89	10	808.2027	46,70
T 30	89	10	808.2030	46,70
T 40	89	10	808.2040	46,70
T 10	110	10	808.3010	47,35
T 15	110	10	808.3015	47,35
T 20	110	10	808.3020	47,35
T 25	110	10	808.3025	47,35
T 27	110	10	808.3027	47,35
T 30	110	10	808.3030	47,35
T 40	110	10	808.3040	47,35
T 10	127	10	808.4010	67,08
T 15	127	10	808.4015	67,08
T 20	127	10	808.4020	67,08
T 25	127	10	808.4025	67,08
T 27	127	10	808.4027	67,08
T 30	127	10	808.4030	67,08
T 40	127	10	808.4040	67,08
T 10	152	10	808.5010	79,03
T 15	152	10	808.5015	79,03
T 20	152	10	808.5020	79,03
T 25	152	10	808.5025	79,03
T 27	152	10	808.5027	79,03
T 30	152	10	808.5030	79,03
T 40	152	10	808.5040	79,03

Screwdriving bit T-T, E6.3



Execution: Screwdriving bit with E6.3 bit connection, profile T-T (Torx Tamper).
Application: Ideal for computers, home appliances, power tools, etc.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 T	50	2	808.70102	7,94
T 15 T	50	2	808.70152	7,94
T 20 T	50	2	808.70202	7,94
T 25 T	50	2	808.70252	7,94
T 30 T	50	2	808.70302	7,94
T 40 T	50	2	808.70402	7,94

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10 T	50	10	808.7010	37,60
T 15 T	50	10	808.7015	37,60
T 20 T	50	10	808.7020	37,60
T 25 T	50	10	808.7025	37,60
T 27 T	50	10	808.7027	37,81
T 30 T	50	10	808.7030	37,60
T 40 T	50	10	808.7040	37,60

809 Screwdriving bit SQD, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile SQD (Robertson).
Application: Production of recreational vehicles (RV's), air ducts and furniture.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 0	25	2	809.00002	2,12
SQD 1	25	2	809.00012	2,12
SQD 2	25	2	809.00022	2,12
SQD 3	25	2	809.00032	2,12

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 0	25	10	809.0000	8,55
SQD 1	25	10	809.0001	8,55
SQD 2	25	10	809.0002	8,55
SQD 3	25	10	809.0003	8,55

810 Screwdriving bit SQD, E6.3




Execution: Screwdriving bit with E6.3 bit connection, profile SQD (Robertson).
Application: Production of recreational vehicles (RV's), air ducts and furniture.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 0	50	2	810.00002	3,99
SQD 1	50	2	810.00012	3,99
SQD 2	50	2	810.00022	3,99
SQD 3	50	2	810.00032	3,99
SQD 0	70	1	810.10001	2,96
SQD 1	70	1	810.10011	2,96
SQD 2	70	1	810.10021	2,96
SQD 3	70	1	810.10031	2,96
SQD 0	89	1	810.20001	3,85
SQD 1	89	1	810.20011	3,85
SQD 2	89	1	810.20021	3,85
SQD 3	89	1	810.20031	3,85

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 0	50	10	810.0000	17,87
SQD 1	50	10	810.0001	17,87
SQD 2	50	10	810.0002	17,87
SQD 3	50	10	810.0003	17,87
SQD 0	70	10	810.1000	24,99
SQD 1	70	10	810.1001	24,99
SQD 2	70	10	810.1002	24,99
SQD 3	70	10	810.1003	24,99
SQD 0	89	10	810.2000	33,76
SQD 1	89	10	810.2001	33,76
SQD 2	89	10	810.2002	33,76
SQD 3	89	10	810.2003	33,76

Screwdriving bit HEX, C6.3

Execution: Screwdriving bit with C6.3 bit connection, profile HEX (Allen).



Type	l ₁	pcs/PU	Item no.	€ / PU
SW 2	25	2	811.00202	2,96
SW 2,5	25	2	811.00252	2,96
SW 3	25	2	811.00302	2,96
SW 4	25	2	811.00402	2,96
SW 5	25	2	811.00502	2,96
SW 6	25	2	811.00602	2,96
SW 7	25	2	811.00702	3,84
SW 8	25	2	811.00802	4,27
SW 10	25	2	811.01002	5,88

Type	l ₁	pcs/PU	Item no.	€ / PU
SW 2	25	10	811.0020	12,72
SW 2,5	25	10	811.0025	12,72
SW 3	25	10	811.0030	12,72
SW 4	25	10	811.0040	12,72
SW 5	25	10	811.0050	12,72
SW 6	25	10	811.0060	12,72
SW 7	25	10	811.0070	17,10
SW 8	25	10	811.0080	19,29
SW 10	25	10	811.0100	27,29

Screwdriving bit HEX, C6.3, ball head

Execution: Screwdriving bit with C6.3 bit connection, profile HEX (Allen), with ball head.

Application: For hard to reach screws and bolts with hex-socket drive. Max. axial angle is 25°.



Type	l ₁	pcs/PU	Item no.	€ / PU
SW 2	25	2	811.10202	5,20
SW 2,5	25	2	811.10252	5,20
SW 3	25	2	811.10302	5,20
SW 4	25	2	811.10402	5,20
SW 5	25	2	811.10502	5,20
SW 6	25	2	811.10602	5,20

Type	l ₁	pcs/PU	Item no.	€ / PU
SW 2	25	10	811.1020	23,90
SW 2,5	25	10	811.1025	23,90
SW 3	25	10	811.1030	23,90
SW 4	25	10	811.1040	23,90
SW 5	25	10	811.1050	23,90
SW 6	25	10	811.1060	23,90

Screwdriving bit HEX, E6.3

Execution: Screwdriving bit with E6.3 bit connection, profile HEX (Allen).



Type	l ₁	pcs/PU	Item no.	€ / PU
SW 2	50	2	811.20202	6,84
SW 2,5	50	2	811.20252	6,84
SW 3	50	2	811.20302	6,84
SW 4	50	2	811.20402	6,84
SW 5	50	2	811.20502	6,84
SW 6	50	2	811.20602	6,84
SW 8	50	2	811.20802	8,33

Type	l ₁	pcs/PU	Item no.	€ / PU
SW 2	50	10	811.2020	32,12
SW 2,5	50	10	811.2025	32,12
SW 3	50	10	811.2030	32,12
SW 4	50	10	811.2040	32,12
SW 5	50	10	811.2050	32,12
SW 6	50	10	811.2060	32,12
SW 8	50	10	811.2080	39,57

812

Screwdriving bit SL, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile SL (Slot).

Type	l ₁	pcs/PU	Item no.	€ / PU
SL 0,5 x 3,0	25	2	812.00302	2,24
SL 0,6 x 3,5	25	2	812.00352	2,24
SL 0,8 x 4,0	25	2	812.00402	2,24
SL 1,0 x 5,5	25	2	812.00552	2,24
SL 1,2 x 6,5	25	2	812.00652	2,24
SL 1,6 x 8,0	25	2	812.00802	3,16

Type	l ₁	pcs/PU	Item no.	€ / PU
SL 0,5 x 3,0	25	10	812.0030	9,10
SL 0,6 x 3,5	25	10	812.0035	9,10
SL 0,8 x 4,0	25	10	812.0040	9,10
SL 1,0 x 5,5	25	10	812.0055	9,10
SL 1,2 x 6,5	25	10	812.0065	9,10
SL 1,6 x 8,0	25	10	812.0080	13,71

Screwdriving bit SL, E6.3



Execution: Screwdriving bit with E6.3 bit connection, profile SL (Slot).

Type	l ₁	pcs/PU	Item no.	€ / PU
SL 0,6 x 3,5	50	2	812.10352	4,69
SL 0,8 x 4,0	50	2	812.10402	4,69
SL 1,0 x 5,5	50	2	812.10552	4,69
SL 1,2 x 6,5	50	2	812.10652	4,69
SL 1,6 x 8,0	50	2	812.10802	6,75

Type	l ₁	pcs/PU	Item no.	€ / PU
SL 0,6 x 3,5	50	10	812.1035	21,37
SL 0,8 x 4,0	50	10	812.1040	21,37
SL 1,0 x 5,5	50	10	812.1055	21,37
SL 1,2 x 6,5	50	10	812.1065	21,37
SL 1,6 x 8,0	50	10	812.1080	31,68

813

Screwdriving bit XZN, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile XZN (Triple-square).
Application: Automotive industry.

Type	l ₁	pcs/PU	Item no.	€ / PU
XZN M4	25	2	813.00042	3,42
XZN M5	25	2	813.00052	3,42
XZN M6	25	2	813.00062	3,42
XZN M8	25	2	813.00082	6,16
XZN M10	25	2	813.00102	6,16

Type	l ₁	pcs/PU	Item no.	€ / PU
XZN M4	25	10	813.0004	15,02
XZN M5	25	10	813.0005	15,02
XZN M6	25	10	813.0006	15,02
XZN M8	25	10	813.0008	28,71
XZN M10	25	10	813.0010	28,71

814

Screwdriving bit SP, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile SP (Spanner).


Application: Safety screws, home appliances and power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
SP 4	25	2	814.00042	6,12
SP 6	25	2	814.00062	6,12
SP 8	25	2	814.00082	6,12
SP 10	25	2	814.00102	6,12

Type	l ₁	pcs/PU	Item no.	€ / PU
SP 4	25	10	814.0004	28,50
SP 6	25	10	814.0006	28,50
SP 8	25	10	814.0008	28,50
SP 10	25	10	814.0010	28,50

815

Screwdriving bit TW, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile TW (Tri-Wing).


Application: Safety screws, home appliances and power tools.

Type	l ₁	pcs/PU	Item no.	€ / PU
TW 1	25	2	815.00012	6,55
TW 2	25	2	815.00022	6,55
TW 3	25	2	815.00032	6,55
TW 4	25	2	815.00042	6,55
TW 5	25	2	815.00052	6,55
TW 6	25	2	815.00062	6,55
TW 7	25	2	815.00072	6,55

Type	l ₁	pcs/PU	Item no.	€ / PU
TW 1	25	10	815.0001	30,69
TW 2	25	10	815.0002	30,69
TW 3	25	10	815.0003	30,69
TW 4	25	10	815.0004	30,69
TW 5	25	10	815.0005	30,69
TW 6	25	10	815.0006	30,69
TW 7	25	10	815.0007	30,69

815

Screwdriving bit TS, C6.3



Execution: Screwdriving bit with C6.3 bit connection, profile TS (Torq-set).

Application: Space and aviation industry.

Type	l ₁	pcs/PU	Item no.	€ / PU
TS 1	25	2	815.10012	6,55
TS 2	25	2	815.10022	6,55
TS 3	25	2	815.10032	6,55
TS 4	25	2	815.10042	6,55
TS 5	25	2	815.10052	6,55
TS 6	25	2	815.10062	6,55
TS 8	25	2	815.10082	6,55
TS 10	25	2	815.10102	6,55

TS 1	25	10	815.1001	30,69
TS 2	25	10	815.1002	30,69
TS 3	25	10	815.1003	30,69
TS 4	25	10	815.1004	30,69
TS 5	25	10	815.1005	30,69
TS 6	25	10	815.1006	30,69
TS 8	25	10	815.1008	30,69
TS 10	25	10	815.1010	30,69



825.0300



825.0305

NEW



825.0300



825.0305



Description	Content	📦	pcs/PU	Item no.	€ / PU
34 pcs BASIC Bit-set	PH (Phillips) : 2x PH1, 4x PH2 and 2x PH3 PZ (Pozi) : 2x PZ1, 4x PZ2 and 2x PZ3 T (Torx®) : 2x T10, 2x T15, 4x T20, 4x T25, 1x T27, 2x T30 and 2x T40 1x Bit holder (magnetic)	10	1	825.0300	24,15
34 pcs BASIC Bit-set	PH (Phillips) : 1x PH1, 2x PH2 and 1x PH3 PZ (Pozi) : 1x PZ1, 2x PZ2 and 1x PZ3 SL (Slot) : 1x SL3, 1x SL4, 1x SL5,5 and 1x SL6,5 T (Torx®) : 1x T10, 1x T15, 2x T20, 2x T25, 1x T30 and 1x T40 TT (Torx Tamper) : 1x TT10, 1xTT15, 1x TT20, 1x TT25, 1x TT27, 1x TT30 and 1x TT40 SQD (Robertson) : 1x SQD2 HEX (Inbus) : 1x HEX2,5, 1x HEX3, 1x HEX4, 1x HEX5 and 1x HEX6 1x Bit holder (magnetic)	10	1	825.0305	26,73



825.0105

825.0110

818.0001

825.0106

825.0111

818.0080



Description	Content	pcs/PU	Item no.	€/PU
13-pc. Bit set 'BASIC'	PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25, 30 and 40 1x magnetic bitholder (818.0001)	1	825.0105	16,50
13-pc. Bit set 'BASIC' + 'SLIM'	PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3 T (Torx®) : 15, 20, 25, 30 and 40 1x magnetic quick-change bitholder 'SLIM' (818.0080)	1	825.0106	19,95
13-pc. Bit set 'BASIC'	T (Torx®) : 1x10, 2x15, 3x20, 3x25, 2x30 and 1x40 1x magnetic bitholder (818.0001)	1	825.0110	21,50
13-pc. Bit set 'BASIC' + 'SLIM'	T (Torx®) : 1x10, 2x15, 3x20, 3x25, 2x30 and 1x40 1x magnetic quick-change bitholder 'SLIM' (818.0080)	1	825.0111	24,95



825.0120

825.0125

825.0130



Description	Content	pcs/PU	Item no.	€/PU
6-pc. Bit set 'BASIC' 50mm PH-PZ	PH (Phillips) : 1, 2 and 3 PZ (Pozi) : 1, 2 and 3	12	825.0120	9,95
6-pc. Bit set 'BASIC' 50mm PH-PZ-T	PH (Phillips) : 2 PZ (Pozi) : 2 T (Torx®) : 15, 20, 25 and 30	12	825.0125	13,95
6-pc. Bit set 'BASIC' 50mm T	T (Torx®) : 10, 15, 20, 25, 30 and 40	12	825.0130	17,95




825.0135



825.0140



**IMPACT
BLACK**

Description	Content		pcs/PU	Item no.	€ / PU
6-pc. IMPACT bit set 50mm PH-PZ-T	PH (Phillips) : 2 PZ (Pozi) : 2 T (Torx®) : 15, 20, 25 en 30	12	1	825.0135	19,95
6-pc. IMPACT bit set 50mm T	T (Torx®) : 10, 15, 20, 25, 30 and 40	12	1	825.0140	19,95

BLACK IMPACT BITS

High precision profiles reach extremely high fitting accuracy in the screw head

Sustainable reduction of bit tip stress

Absorption of impact power through the optimised torsion zone

High stability workmanship, made of molybdenum vanadium steel

The diagram shows a black impact bit with a textured torsion zone. Orange arrows indicate the flow of impact power through this zone. The bit is labeled 'BLACK IMPACT' and 'PZ2'.

DIAMOND IMPACT BITS

Small diamonds grab themselves in the screw, thereby counteracting the so-called „Cam-Out-Effect“

High precision profiles reach extremely high fitting accuracy in the screw head

Sustainable reduction of bit tip stress

Absorption of impact power through the optimised torsion zone

High stability workmanship, made of molybdenum vanadium steel

The diagram shows a diamond impact bit with a textured torsion zone. Blue arrows indicate the flow of impact power through this zone. The bit is labeled 'ROTEC 817.0302', 'IMPACT DIAMOND', and 'PH2 Made in Germany'.

ATHLET IMPACT BITS WITH TORSION ZONE

Modern impact drills are getting increasingly strong, leading to higher torques and more powerful impact forces being transmitted. At the same time, the requirements for the bits are increasing. ATHLET, however, provides a reliable solution: The impact bits.

These bits are designed with an optimised torsion zone. This zone absorbs the high impact force of power tools and, as a result, sustainably reduces the bit tip stress. Thus the bit stays eminently long-lasting.

The ATHLET impact bits are made of high-alloy molybdenum vanadium steel, afterwards tempered tough and hard. The combination of high stability workmanship and a sophisticated

torsion zone ensures a professional tightening process – for the long run.

Our impact bits have high precision profiles and reach an extremely high fitting accuracy in the screw head.

They are available in lengths of 30 and 50 mm. The 50 mm version can be applied directly, without additional bit holder, into impact screwdrivers.

ATHLET completes the impact bits series with an additional magnetic impact bit holder for our impact bits in 30 mm length. The additional torsion zone of the Impact magnetic bit holder supports the 30 mm impact bits in the aspect of absorbing high impact forces.

817

IMPACT Screwdriving bit PH, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	30	2	817.00012	3,84
PH 2	30	2	817.00022	3,84
PH 3	30	2	817.00032	3,84
PH 1	30	10	817.0001	17,10
PH 2	30	10	817.0002	17,10
PH 3	30	10	817.0003	17,10

IMPACT Screwdriving bit PH, E6.3



Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	50	2	817.01012	7,12
PH 2	50	2	817.01022	7,12
PH 3	50	2	817.01032	7,12
PH 1	50	5	817.0101	16,78
PH 2	50	5	817.0102	16,78
PH 3	50	5	817.0103	16,78

IMPACT Screwdriving bit PH, C6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	30	2	817.02012	8,37
PH 2	30	2	817.02022	8,37
PH 3	30	2	817.02032	8,37
PH 1	30	10	817.0201	39,79
PH 2	30	10	817.0202	39,79
PH 3	30	10	817.0203	39,79

IMPACT Screwdriving bit PH, E6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile PH (Phillips).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	50	2	817.03012	11,69
PH 2	50	2	817.03022	11,69
PH 3	50	2	817.03032	11,69
PH 1	50	5	817.0301	28,17
PH 2	50	5	817.0302	28,17
PH 3	50	5	817.0303	28,17

IMPACT Screwdriving bit PZ, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	30	2	817.10012	3,84
PZ 2	30	2	817.10022	3,84
PZ 3	30	2	817.10032	3,84
PZ 1	30	10	817.1001	17,10
PZ 2	30	10	817.1002	17,10
PZ 3	30	10	817.1003	17,10

IMPACT Screwdriving bit PZ, E6.3



Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	50	2	817.11012	7,12
PZ 2	50	2	817.11022	7,12
PZ 3	50	2	817.11032	7,12
PZ 1	50	5	817.1101	16,78
PZ 2	50	5	817.1102	16,78
PZ 3	50	5	817.1103	16,78

IMPACT Screwdriving bit PZ, C6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	30	2	817.12012	8,37
PZ 2	30	2	817.12022	8,37
PZ 3	30	2	817.12032	8,37
PZ 1	30	10	817.1201	39,79
PZ 2	30	10	817.1202	39,79
PZ 3	30	10	817.1203	39,79

IMPACT Screwdriving bit PZ, E6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile PZ (Pozidriv).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	50	2	817.13012	11,69
PZ 2	50	2	817.13022	11,69
PZ 3	50	2	817.13032	11,69
PZ 1	50	5	817.1301	28,17
PZ 2	50	5	817.1302	28,17
PZ 3	50	5	817.1303	28,17

IMPACT Screwdriving bit T, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	30	2	817.20102	4,98
T 15	30	2	817.20152	4,98
T 20	30	2	817.20202	4,98
T 25	30	2	817.20252	4,98
T 30	30	2	817.20302	4,98
T 40	30	2	817.20402	4,98

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	30	10	817.2010	22,80
T 15	30	10	817.2015	22,80
T 20	30	10	817.2020	22,80
T 25	30	10	817.2025	22,80
T 30	30	10	817.2030	22,80
T 40	30	10	817.2040	22,80

IMPACT Screwdriving bit T, E6.3




Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	50	2	817.21102	8,37
T 15	50	2	817.21152	8,37
T 20	50	2	817.21202	8,37
T 25	50	2	817.21252	8,37
T 30	50	2	817.21302	8,37
T 40	50	2	817.21402	8,37

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	50	5	817.2110	19,90
T 15	50	5	817.2115	19,90
T 20	50	5	817.2120	19,90
T 25	50	5	817.2125	19,90
T 30	50	5	817.2130	19,90
T 40	50	5	817.2140	19,90

IMPACT Screwdriving bit T, C6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	30	2	817.22102	9,52
T 15	30	2	817.22152	9,52
T 20	30	2	817.22202	9,52
T 25	30	2	817.22252	9,52
T 30	30	2	817.22302	9,52
T 40	30	2	817.22402	9,52

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	30	10	817.22110	45,49
T 15	30	10	817.22115	45,49
T 20	30	10	817.22210	45,49
T 25	30	10	817.22215	45,49
T 30	30	10	817.22310	45,49
T 40	30	10	817.22410	45,49

IMPACT Screwdriving bit T, E6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile T (Torx).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	50	2	817.23102	12,94
T 15	50	2	817.23152	12,94
T 20	50	2	817.23202	12,94
T 25	50	2	817.23252	12,94
T 30	50	2	817.23302	12,94
T 40	50	2	817.23402	12,94

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	50	5	817.23110	31,29
T 15	50	5	817.23115	31,29
T 20	50	5	817.23210	31,29
T 25	50	5	817.23215	31,29
T 30	50	5	817.23310	31,29
T 40	50	5	817.23410	31,29

IMPACT Screwdriving bit SQD, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 1	30	2	817.30012	4,98
SQD 2	30	2	817.30022	4,98
SQD 3	30	2	817.30032	4,98
SQD 1	30	10	817.3001	22,80
SQD 2	30	10	817.3002	22,80
SQD 3	30	10	817.3003	22,80

IMPACT Screwdriving bit SQD, E6.3




Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 1	50	2	817.31012	8,37
SQD 2	50	2	817.31022	8,37
SQD 3	50	2	817.31032	8,37
SQD 1	50	5	817.3101	19,90
SQD 2	50	5	817.3102	19,90
SQD 3	50	5	817.3103	19,90

IMPACT Screwdriving bit SQD, C6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with C6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 1	30	2	817.32012	9,52
SQD 2	30	2	817.32022	9,52
SQD 3	30	2	817.32032	9,52
SQD 1	30	10	817.3201	45,49
SQD 2	30	10	817.3202	45,49
SQD 3	30	10	817.3203	45,49

IMPACT Screwdriving bit SQD, E6.3, 'DIAMOND'



Execution: IMPACT Screwdriving bit 'DIAMOND' with E6.3 bit connection, profile SQD (Robertson).

Application: IMPACT Screwdriving bits 'DIAMOND' for impact-screwdriver machines. The base for a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 1	50	2	817.33012	12,94
SQD 2	50	2	817.33022	12,94
SQD 3	50	2	817.33032	12,94
SQD 1	50	5	817.3301	31,29
SQD 2	50	5	817.3302	31,29
SQD 3	50	5	817.3303	31,29

IMPACT Screwdriving bit HEX, C6.3



Execution: IMPACT Screwdriving bit with C6.3 bit connection, profile HEX (Allen).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base of a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
SW 3	30	2	817.40032	4,98
SW 4	30	2	817.40042	4,98
SW 5	30	2	817.40052	4,98
SW 6	30	2	817.40062	4,98
SW 3	30	10	817.4003	22,80
SW 4	30	10	817.4004	22,80
SW 5	30	10	817.4005	22,80
SW 6	30	10	817.4006	22,80

IMPACT Screwdriving bit HEX, E6.3



Execution: IMPACT Screwdriving bit with E6.3 bit connection, profile HEX (Allen).

Application: IMPACT Screwdriving bits 'BLACK' for impact-screwdriver machines. The base of a perfectly tough and resilient screwdriver bit is the result of a combination of a hardened special steel and an optimised geometries. Ideal screwdriver bit for the toughest applications.

Type	l ₁	pcs/PU	Item no.	€ / PU
SW 3	50	2	817.41032	8,37
SW 4	50	2	817.41042	8,37
SW 5	50	2	817.41052	8,37
SW 6	50	2	817.41062	8,37
SW 3	50	5	817.4103	19,90
SW 4	50	5	817.4104	19,90
SW 5	50	5	817.4105	19,90
SW 6	50	5	817.4106	19,90

825

IMPACT bit-set, E6.3



825.0135



825.0140



Description	Content	📦	pcs/PU	Item no.	€ / PU
6-pc. IMPACT bit set 50mm PH-PZ-T	PH (Phillips) : 2 PZ (Pozi) : 2 T (Torx®) : 15, 20, 25 en 30	12	1	825.0135	19,95
6-pc. IMPACT bit set 50mm T	T (Torx®) : 10, 15, 20, 25, 30 and 40	12	1	825.0140	19,95

818

Bit holder | without C-ring

ROTEC®



Execution: Magnetic bit holders without C-ring. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	Body	pcs/PU	Item no.	€ / PU
Magnetic	60	ø10 x 35	1	818.00011	4,32
Magnetic	60	ø10 x 35	10	818.0001	38,26

Bit holder | with C-ring

ROTEC®



Execution: Magnetic bit holders with C-ring. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	Body	pcs/PU	Item no.	€ / PU
Magnetic	60	ø11 x 35	1	818.00101	5,42
Magnetic	74	ø11 x 35	1	818.00151	8,71
Magnetic	100	ø10 x 35	1	818.00251	16,86
Magnetic	150	ø10 x 35	1	818.00301	19,12
Magnetic	200	ø10 x 35	1	818.00351	20,45
Magnetic	250	ø10 x 35	1	818.00401	20,73
Magnetic	60	ø11 x 35	10	818.0010	49,22
Magnetic	74	ø11 x 35	10	818.0015	82,11
Magnetic	100	ø10 x 35	10	818.0025	163,58
Magnetic	150	ø10 x 35	10	818.0030	185,40
Magnetic	200	ø10 x 35	10	818.0035	196,36
Magnetic	250	ø10 x 35	10	818.0040	207,32

Stainless steel bit holder | with C-ring

ROTEC®



Execution: Non-magnetic bit holders with C-ring for stainless steel bits. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	Body	pcs/PU	Item no.	€ / PU
Non-magnetic	60	ø11x32	1	818.00171	5,42
Non-magnetic	60	ø11x32	10	818.0017	49,22



Execution: Magnetic stainless steel bit holders with C-ring. Machined from one piece. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	Body	pcs/PU	Item no.	€ / PU
Magnetic	74	ø9,6x45	1	818.00201	9,19
Magnetic	74	ø9,6x45	10	818.0020	86,96

Bit holder, for drywall screws

ROTEC®



Execution: Magnetic bit holder for drywall screws. Hexagon shank according to DIN 3126-E6.3 (ISO 1173). Including 1x PRO-bit PH 2 BASIC.

Type	l ₁	pcs/PU	Item no.	€ / PU
Magnetic	65	1	818.0045	10,89

Bit holder, SDS-plus


Execution: Magnetic bit holder with C-ring. SDS+ (ø10mm) shank.



Type	l ₁	Body	pcs/PU	Item no.	€ / PU
Magnetic	85	ø11 x 35	1	818.00501	16,92
Magnetic	85	ø11 x 35	10	818.0050	163,58

Bit holder, quick-lock

Execution: Magnetic quick-change bit holder. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).




Type	l ₁	pcs/PU	Item no.	€ / PU
QuickFix	60	1	818.0060	10,89




Execution: 'SLIM'-type magnetic quick-change bit holder. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	d ₃	pcs/PU	Item no.	€ / PU
'SLIM'	61	12	1	818.0080	13,95



Execution: Magnetic bit holder with ball-joint (up to 20°). Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	pcs/PU	Item no.	€ / PU
ANGLE	65	1	818.0065	19,64



Execution: Magnetic quick-change bit holder. With ring magnet. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	pcs/PU	Item no.	€ / PU
TWIN	65	1	818.0070	10,89



Execution: Magnetic quick-change bit holder. With magnet and ball-joint (up to 20°). Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l ₁	pcs/PU	Item no.	€ / PU
TripleFix	90	1	818.0067	23,28



Execution: Magnetic quick-change bit holder, extra long. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	l_1	pcs/PU	Item no.	€ / PU
TWIN	250	1	818.0085	23,28



Execution: Magnetic quick-change bit holder, extra long and flexible shaft. Hexagon shank according to DIN 3126-E6.3 (ISO 1173). Maximum torque allowed: 8 Nm.

Type	l_1	pcs/PU	Item no.	€ / PU
Flex	225	1	818.0090	26,52



Execution: Bit holder, square to 1/4"-C6.3 with circlip.


A_1	A_2	pcs/PU	Item no.	€ / PU
1/4" square (F)	1/4" - C6.3 (F)	1	818.5000	11,92
1/2" square (F)	1/4" - C6.3 (F)	1	818.5020	16,31



Execution: Quick-change bit holder, square to 1/4"-C6.3.


A_1	A_2	pcs/PU	Item no.	€ / PU
1/4" square (F)	1/4" - C6.3 (F)	1	818.5100	18,17
3/8" square (F)	1/4" - C6.3 (F)	1	818.5110	22,06
1/2" square (F)	1/4" - C6.3 (F)	1	818.5120	27,25

2C-Bit screwdriver



Execution: Bit screwdriver with ergonomical 2C-grip, stainless steel sleeve and a strong permanent magnet.

Execution	l_1	pcs/PU	Item no.	€ / PU
Magnetic, w/o C-ring	230	1	818.8010	14,61



Execution: Bit screwdriver with ergonomical 2C-grip, Quick-Lock-system with stainless steel sleeve and a strong permanent magnet.

Execution	l_1	pcs/PU	Item no.	€ / PU
Magnetic, with Quick-Lock	130	1	818.8020	13,46
Magnetic, with Quick-Lock	230	1	818.8030	17,18



Execution: Bit-screwdriver with plastic coated flexible shank, ergonomical 2C-grip, stainless steel sleeve, circlip and a strong permanent magnet.

Execution	l_1	pcs/PU	Item no.	€ / PU
Magnetic, with C-ring	310	1	818.8040	23,28



Bit ratchet



Execution: Handy bi-directional magnetic bit ratchet for 1/4" screwdriving bit.

Type	l_1	pcs/PU	Item no.	€ / PU
Magnetic	95	1	818.9001	29,24



1C-Bit-screwdriver, T-handle



Execution: Bit screwdriver with ergonomical 1C-T-handle, stainless steel sleeve and a strong permanent magnet.

Type	l_1	pcs/PU	Item no.	€ / PU
Magnetic	125	1	818.9500	10,15




IMPACT C-Ring bit holder



Execution: Magnetic impact bit holder with C-ring. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	L ₁	Body	pcs/PU	Item no.	€ / PU
Magnetic	80	ø11 x 35	1	818.1010	14,17


IMPACT Bit holder | QuickFix II

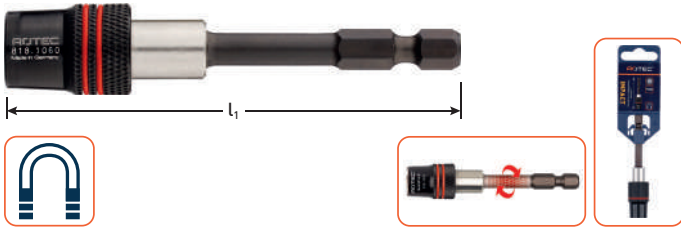

Execution: Magnetic impact bit holder with quick change system. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	L ₁	Body	pcs/PU	Item no.	€ / PU
Quick-Fix II	80	ø11 x 35	1	818.1060	21,83

IMPACT Bit holder | Twin

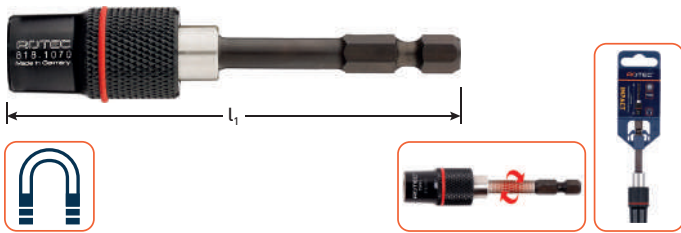

Execution: Magnetic impact bit holder with quick change system. Hexagon shank according to DIN 3126-E6.3 (ISO 1173).

Type	L ₁	Body	pcs/PU	Item no.	€ / PU
Impact TWIN	85	ø11 x 35	1	818.1070	27,30

PRO Screwdriving bit PH, 5/16"


Execution: PRO Screwdriving bit with 5/16" bit connection, profile PH (Phillips).



Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	32	1	816.0001	2,93
PH 2	32	1	816.0002	2,93
PH 3	32	1	816.0003	2,93
PH 4	38	1	816.0004	6,07

PRO Screwdriving bit PZ, 5/16"

Execution: PRO Screwdriving bit with 5/16" bit connection, profile PZ (Pozidriv).



Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	32	1	816.1001	2,93
PZ 2	32	1	816.1002	2,93
PZ 3	32	1	816.1003	2,93
PZ 4	38	1	816.1004	6,07

PRO Screwdriving bit T, 5/16"

Execution: PRO Screwdriving bit with 5/16" bit connection, profile T (Torx).



Type	l ₁	pcs/PU	Item no.	€ / PU
T 25	32	1	816.2025	4,32
T 27	32	1	816.2027	4,32
T 30	32	1	816.2030	4,32
T 50	32	1	816.2050	4,32
T 55	38	1	816.2055	7,06
T 60	38	1	816.2060	8,93

PRO Screwdriving bit HEX, 5/16"


Execution: PRO Screwdriving bit with 5/16" bit connection, profile HEX (Allen).



Type	l ₁	pcs/PU	Item no.	€ / PU
SW 3	32	1	816.3003	4,21
SW 4	32	1	816.3004	4,21
SW 5	32	1	816.3005	4,21
SW 6	32	1	816.3006	4,21
SW 7	38	1	816.3007	4,21
SW 8	38	1	816.3008	4,21
SW 9	38	1	816.3009	6,71
SW 10	38	1	816.3010	6,54

819


Nu setter, magnetic

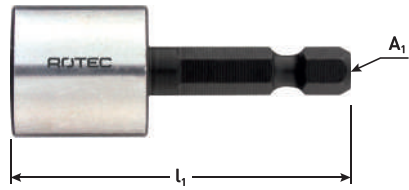

Execution: Nut setter, E6.3, magnetic

Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 5	50	1/4" - E6.3	1	819.00501	4,99
SW 5,5	50	1/4" - E6.3	1	819.00551	4,99
SW 6	50	1/4" - E6.3	1	819.00601	4,99
SW 7	50	1/4" - E6.3	1	819.00701	5,15
SW 8	50	1/4" - E6.3	1	819.00801	5,15
SW 9	50	1/4" - E6.3	1	819.00901	5,34
SW 10	50	1/4" - E6.3	1	819.01001	5,34
SW 11	50	1/4" - E6.3	1	819.01101	5,65
SW 12	50	1/4" - E6.3	1	819.01201	5,89
SW 13	50	1/4" - E6.3	1	819.01301	5,89
SW 14	65	1/4" - E6.3	1	819.01401	12,67
SW 17	65	1/4" - E6.3	1	819.01701	12,67
SW 19	65	1/4" - E6.3	1	819.01901	12,67
SW 5	50	1/4" - E6.3	3	819.0050	13,51
SW 5,5	50	1/4" - E6.3	3	819.0055	13,51
SW 6	50	1/4" - E6.3	3	819.0060	13,51
SW 7	50	1/4" - E6.3	3	819.0070	13,95
SW 8	50	1/4" - E6.3	3	819.0080	13,95
SW 9	50	1/4" - E6.3	3	819.0090	14,57
SW 10	50	1/4" - E6.3	3	819.0100	14,57
SW 11	50	1/4" - E6.3	3	819.0110	14,57
SW 12	50	1/4" - E6.3	3	819.0120	15,31
SW 13	50	1/4" - E6.3	3	819.0130	15,31
SW 14	65	1/4" - E6.3	3	819.0140	35,65
SW 17	65	1/4" - E6.3	3	819.0170	35,65
SW 19	65	1/4" - E6.3	3	819.0190	35,65

Nut setter, magnetic (imperial)

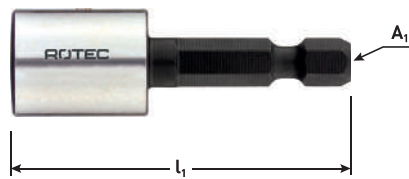

Execution: Nut setter, E6.3, magnetic

Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 1/4	50	1/4" - E6.3	1	819.10101	4,99
SW 5/16	50	1/4" - E6.3	1	819.10201	5,15
SW 3/8	50	1/4" - E6.3	1	819.10301	5,34
SW 1/4	50	1/4" - E6.3	3	819.1010	13,51
SW 5/16	50	1/4" - E6.3	3	819.1020	13,95
SW 3/8	50	1/4" - E6.3	3	819.1030	14,57

900

Nut setter set, magnetic



Execution: Set of magnetic socket wrenches equipped with E6.3 HEX connection for use in cordless drill.

Application: Suitable for loosening and tightening bolts and nuts.

Remark: Socket wrench 5/16" is not physically in the set, but bolts and nuts of this size can be fixed with socket spanner size SW 8.

Description	Type	Content	pcs/PU	Item no.	€ / PU
7 pc set nut setters with E6.3 1/4"-bit shank, in ABS-cas-sette	819	1x HEX 7 1x HEX 8 (HEX 5/16") 1x HEX 10 1x HEX 12 1x HEX 13 1x HEX 1/4" 1x HEX 3/8"	1	819.9000	44,29

Stud driver


Application: Handy accessory for placing of stud screws.



d_1	l_1	A_1	pcs/PU	Item no.	€ / PU
M6	50	1/4" - E6.3	1	819.6006	11,69
M8	50	1/4" - E6.3	1	819.6008	12,26
M10	50	1/4" - E6.3	1	819.6010	13,30

819


Nut setter, unmagnetic

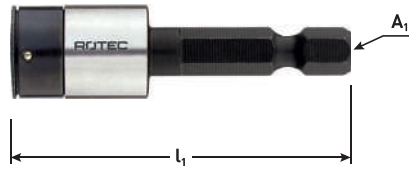

Execution: Nut setter, E6.3, unmagnetic

Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 5	50	1/4" - E6.3	1	819.20501	5,40
SW 5,5	50	1/4" - E6.3	1	819.20551	5,40
SW 6	50	1/4" - E6.3	1	819.20601	5,40
SW 7	50	1/4" - E6.3	1	819.20701	5,54
SW 8	50	1/4" - E6.3	1	819.20801	5,54
SW 9	50	1/4" - E6.3	1	819.20901	5,54
SW 10	50	1/4" - E6.3	1	819.21001	5,85
SW 11	50	1/4" - E6.3	1	819.21101	6,14
SW 12	50	1/4" - E6.3	1	819.21201	6,39
SW 13	50	1/4" - E6.3	1	819.21301	6,39
SW 5	50	1/4" - E6.3	3	819.2050	14,71
SW 5,5	50	1/4" - E6.3	3	819.2055	14,71
SW 6	50	1/4" - E6.3	3	819.2060	14,71
SW 7	50	1/4" - E6.3	3	819.2070	15,15
SW 8	50	1/4" - E6.3	3	819.2080	15,15
SW 9	50	1/4" - E6.3	3	819.2090	15,15
SW 10	50	1/4" - E6.3	3	819.2100	16,07
SW 11	50	1/4" - E6.3	3	819.2110	16,07
SW 12	50	1/4" - E6.3	3	819.2120	16,84
SW 13	50	1/4" - E6.3	3	819.2130	16,84

Nut setter, unmagnetic (imperial)

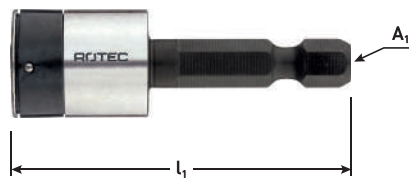

Execution: Nut setter, E6.3, unmagnetic

Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 1/4	50	1/4" - E6.3	1	819.30101	5,69
SW 5/16	50	1/4" - E6.3	1	819.30201	5,85
SW 3/8	50	1/4" - E6.3	1	819.30301	6,14
SW 1/4	50	1/4" - E6.3	3	819.3010	14,71
SW 5/16	50	1/4" - E6.3	3	819.3020	15,15
SW 3/8	50	1/4" - E6.3	3	819.3030	16,07

Nu setter, magnetic, SDS-plus



Execution: Nut setter, SDS-plus, magnetic


Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 8	65	SDS-plus	1	819.50801	12,97
SW 9	65	SDS-plus	1	819.50901	12,97
SW 10	65	SDS-plus	1	819.51001	12,97
SW 11	65	SDS-plus	1	819.51101	13,27
SW 12	65	SDS-plus	1	819.51201	13,27
SW 13	65	SDS-plus	1	819.51301	13,76
SW 14	65	SDS-plus	1	819.51401	14,29
SW 17	65	SDS-plus	1	819.51701	15,24

Nut setter, magnetic, SDS-plus (imperial)



Execution: Nut setter, SDS-plus, magnetic


Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 5/16	65	SDS-plus	1	819.50101	13,76
SW 3/8	65	SDS-plus	1	819.50301	14,29

Hex-socket screwdriver 2C


Execution: Chrome plated hex-socket driver with ergonomical 2C-(two-component) grip.

Type	l_1	pcs/PU	Item no.	€/ PU
SW 3,5 *	230	1	819.6035	12,86
SW 5,5 *	230	1	819.6055	12,86
SW 6 *	230	1	819.6060	12,86
SW 11 *	230	1	819.6110	17,34
SW 12 *	230	1	819.6120	17,47
SW 13 *	230	1	819.6130	18,92
SW 15 *	230	1	819.6150	19,93
SW 17 *	230	1	819.6170	20,87

* Phase-out item, available until stock has depleted



Execution: Hex-socket driver with flexible shaft and ergonomical 2C-(two-component) grip.

Type	l_1	pcs/PU	Item no.	€/ PU
SW 5 *	205	1	819.7050	25,41
SW 6 *	205	1	819.7060	25,41
SW 8 *	205	1	819.7080	25,41
SW 9 *	205	1	819.7090	26,80
SW 10 *	205	1	819.7100	26,80



* Phase-out item, available until stock has depleted

Application: Only for manual use!



A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
1/4"-C6.3	1/4" square (ball)	25	1	820.00101	4,85
1/4"-C6.3	1/4" square (ball)	25	10	820.0010	43,53

Application: Only for manual use!



A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
1/4"-E6.3	1/4" square (ball)	50	1	820.00201	5,30
1/4"-E6.3	1/4" square (ball)	50	10	820.0020	48,06

Adapters with pin

A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
1/4"-E6.3	1/4" square (pin)	50	1	820.00301	5,50
1/4"-E6.3	1/4" square (pin)	50	10	820.0030	50,07




A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
1/4"-E6.3	1/4" square (pin)	100	1	820.00401	6,86
1/4"-E6.3	1/4" square (pin)	100	10	820.0040	63,56



A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
1/4"-E6.3	3/8" square (pin)	50	1	820.00501	8,63
1/4"-E6.3	3/8" square (pin)	50	10	820.0050	81,16



A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
1/4"-E6.3	1/2" square (pin)	50	1	820.00601	9,22
1/4"-E6.3	1/2" square (pin)	50	10	820.0060	85,37

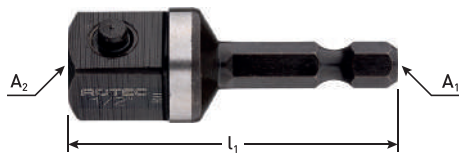

Adapter SDS-plus > Square w. pin



A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
SDS-plus *	1/4" square (pin)	60	1	820.00701	12,84

* Phase-out item, available until stock has depleted



A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
SDS-plus *	3/8" square (pin)	60	1	820.00801	14,30

* Phase-out item, available until stock has depleted



A ₁	A ₂	l ₁	pcs/PU	Item no.	€ / PU
SDS-plus	1/2" square (pin)	65	1	820.00901	15,19

821

IMPACT Nutsetter, magnetic



NEW



Execution: IMPACT Nutsetter magnetic with E6.3 connection for use in impact screwdrivers.

Application: Suitable for loosening and tightening bolts and nuts.

Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 7	80	1/4" - E6.3	1	821.00071	6,31
SW 8	80	1/4" - E6.3	1	821.00081	6,64
SW 10	80	1/4" - E6.3	1	821.00101	7,30
SW 13	80	1/4" - E6.3	1	821.00131	8,62
SW 1/4"	80	1/4" - E6.3	1	821.01011	6,31
SW 5/16"	80	1/4" - E6.3	1	821.01021	6,64
SW 3/8"	80	1/4" - E6.3	1	821.01031	7,30




NEW



Execution: IMPACT Nutsetter magnetic with E6.3 connection for use in impact screwdrivers.

Application: Suitable for loosening and tightening bolts and nuts.

Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 7	150	1/4" - E6.3	1	821.10071	7,83
SW 8	150	1/4" - E6.3	1	821.10081	8,21
SW 10	150	1/4" - E6.3	1	821.10101	8,98
SW 13	150	1/4" - E6.3	1	821.10131	10,52
SW 1/4"	150	1/4" - E6.3	1	821.11011	7,83
SW 5/16"	150	1/4" - E6.3	1	821.11021	8,21
SW 3/8"	150	1/4" - E6.3	1	821.11031	8,98

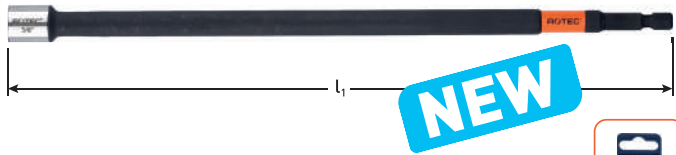


Execution: IMPACT Nutsetter magnetic with E6.3 connection for use in impact screwdrivers.

Application: Suitable for loosening and tightening bolts and nuts.

Type	l ₁	A ₁	pcs/PU	Item no.	€ / PU
SW 7	250	1/4" - E6.3	1	821.20071	17,30
SW 8	250	1/4" - E6.3	1	821.20081	18,18
SW 10	250	1/4" - E6.3	1	821.20101	19,94
SW 13	250	1/4" - E6.3	1	821.20131	20,82
SW 1/4"	250	1/4" - E6.3	1	821.21011	17,30
SW 5/16"	250	1/4" - E6.3	1	821.21021	18,18
SW 3/8"	250	1/4" - E6.3	1	821.21031	19,94

822 Nutsetter extra deep

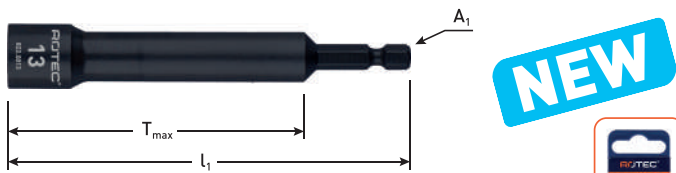


Execution: Extra deep nutsetter fitted with E6.3 connection and internal depth of 75mm.

Application: Suitable for loosening and tightening bolts and nuts, thanks to the internal length of 75 mm especially suitable for loosening and tightening nuts on threaded ends.

Type	l ₁	T _{max}	A ₁	pcs/PU	Item no.	€ / PU
SW 8	110	75	1/4" - E6.3	1	822.0008	10,08
SW 10	110	75	1/4" - E6.3	1	822.0010	10,56
SW 13	110	75	1/4" - E6.3	1	822.0013	11,52
SW 17	110	75	1/4" - E6.3	1	822.0017	14,88

Tilting socket 15°

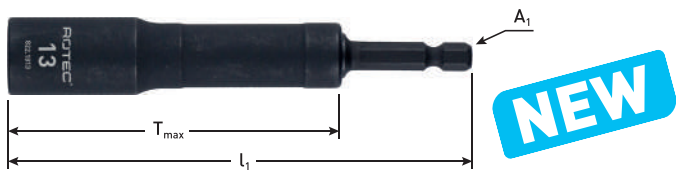

Execution: Tilting socket fitted with flexible E6.3 bit connection, the long E6.3 connection can be used both straight and up to 15° angle adjustment for access to the most awkward places.


Application: Suitable for loosening and tightening bolts and nuts, thanks to the internal length of 62 mm also suitable for loosening and tightening nuts on threaded ends.

Type	l ₁	T _{max}	A ₁	pcs/PU	Item no.	€ / PU
SW 8	115	62	1/4" - E6.3	1	822.1008	18,20
SW 10	115	62	1/4" - E6.3	1	822.1010	18,20
SW 13	115	62	1/4" - E6.3	1	822.1013	18,95
SW 17	115	62	1/4" - E6.3	1	822.1017	18,95

827

OPTI-LINE Screwdriving bit PH, C6.3

ROTEC®



Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	25	2	827.0100	1,25
PH 2	25	2	827.0200	1,25
PH 3	25	2	827.0300	1,25
PH 1	25	25	827.0105	8,70
PH 2	25	25	827.0205	8,70
PH 3	25	25	827.0305	8,70

OPTI-LINE Screwdriving bit PH, C6.3, for drywall screws

ROTEC®



Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile PH (Phillips), with metal collar and excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 2	25	1	827.1000	2,13
PH 2	25	5	827.1002	9,30
PH 2	25	10	827.1005	16,36

OPTI-LINE Screwdriving bit PZ, C6.3

ROTEC®




Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile PZ (Pozidriv), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	25	2	827.1100	1,25
PZ 2	25	2	827.1200	1,25
PZ 3	25	2	827.1300	1,25
PZ 1	25	25	827.1105	8,70
PZ 2	25	25	827.1205	8,70
PZ 3	25	25	827.1305	8,70

OPTI-LINE Screwdriving bit SL, C6.3

ROTEC®




Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile SL (Slot), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
SL 0,6 x 4,5	25	2	827.2450	1,25
SL 0,8 x 5,5 *	25	2	827.2550	1,25
SL 1,2 x 6,5	25	2	827.2650	1,25
SL 0,5 x 4,0	25	25	827.2405	8,70
SL 0,6 x 4,5	25	25	827.2455	8,70
SL 1,0 x 6,0	25	25	827.2605	8,70
SL 1,2 x 6,5	25	25	827.2655	8,70

* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit T, C6.3



Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile T (Torx), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	25	2	827.3100	1,50
T 15	25	2	827.3150	1,50
T 20	25	2	827.3200	1,50
T 25	25	2	827.3250	1,50
T 30	25	2	827.3300	1,50
T 40	25	2	827.3400	1,50
T 10	25	25	827.3105	9,75
T 15	25	25	827.3155	9,75
T 20	25	25	827.3205	9,75
T 25	25	25	827.3255	9,75
T 27	25	25	827.3275	9,75
T 30	25	25	827.3305	9,75
T 40	25	25	827.3405	9,75

OPTI-LINE Screwdriving bit HEX, C6.3



Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile HEX (Inbus), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
SW 3	25	2	827.4300	1,50
SW 4	25	2	827.4400	1,50
SW 3	25	25	827.4305	9,02
SW 4	25	25	827.4405	9,02
HEX 6 *	25	25	827.4605	9,41
HEX 8 *	25	25	827.4805	9,80

* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit SQD, C6.3




Execution: OPTI-LINE Screwdriving bit with C6.3 bit connection, profile SQD (Robertson), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 2	25	25	827.6205	8,70

828


OPTI-LINE Screwdriving bit PH, E6.3



Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile PH (Phillips), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
PH 1	50	2	828.0100	3,43
PH 2	50	2	828.0200	3,43
PH 3	50	2	828.0300	3,43
PH 1	50	10	828.0105	8,39
PH 2	50	10	828.0205	8,39
PH 3	50	10	828.0305	8,39

OPTI-LINE Screwdriving bit PZ, E6.3



Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile PZ (Pozidriv), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
PZ 1	50	2	828.1100	3,43
PZ 2	50	2	828.1200	3,43
PZ 3	50	2	828.1300	3,43
PZ 1	50	10	828.1105	8,39
PZ 2	50	10	828.1205	8,39
PZ 3	50	10	828.1305	8,39

OPTI-LINE Screwdriving bit SL, E6.3




Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile SL (Slot), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
SL 0,5 x 4,0 *	50	10	828.2405	7,50
SL 0,6 x 4,5 *	50	10	828.2455	7,50
SL 0,8 x 5,5 *	50	10	828.2555	7,50
SL 1,0 x 6,0 *	50	10	828.2605	7,50
SL 1,2 x 6,5 *	50	10	828.2655	7,50
SL 1,6 x 8,0 *	50	5	828.2805	7,50

* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit T, E6.3



Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile T (Torx), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
T 10	50	2	828.3100	3,43
T 15	50	2	828.3150	3,43
T 20	50	2	828.3200	3,43
T 25	50	2	828.3250	3,43
T 30	50	2	828.3300	3,43
T 40	50	2	828.3400	3,43
T 10	50	10	828.3105	7,95
T 15	50	10	828.3155	7,95
T 20	50	10	828.3205	7,95
T 25	50	10	828.3255	7,95
T 27	50	10	828.3275	7,95
T 30	50	10	828.3305	7,95
T 40	50	10	828.3405	7,95
T 50 *	50	10	828.3505	7,95

* Phase-out item, available until stock has depleted

OPTI-LINE Screwdriving bit SQD, E6.3



Execution: OPTI-LINE Screwdriving bit with E6.3 bit connection, profile SQD (Robertson), with excellent price-quality ratio.

Type	l ₁	pcs/PU	Item no.	€ / PU
SQD 2	50	10	828.6205	8,39

827 OPTI-LINE Bit holders



Execution: OPTI-LINE Magnetic bit holder, suitable for all 1/4" size screw driving bits.

Type	l ₁	pcs/PU	Item no.	€ / PU
Magnetic	60	1	827.9500	4,02



Execution: OPTI-LINE Magnetic quick-change bit holder, suitable for all 1/4" size screw driving bits.

Type	l ₁	pcs/PU	Item no.	€ / PU
Quick-Lock	60	1	827.9510	6,51

OPTI-LINE IMPACT Bit holders



NEW




Execution: OPTI-LINE IMPACT bit holder, suitable for all 1/4" size screw driving bits.


Type	l ₁	pcs/PU	Item no.	€ / PU
Magnetic	60	1	827.9515	5,95
Magnetic	60	100	827.9715	550,00




OPTI-LINE Bit-set 13 pcs.



827.9050



827.9051



827.9052



827.9053



Description	Content		pcs/PU	Item no.	€ / PU
13 pc. OPTI-LINE bit set	PH (Phillips) : 1 - 2 - 3 PZ (Pozi) : 1 - 2 - 3 T (Torx®) : 10 - 15 - 20 - 25 - 30 - 40 1x Quick-Lock bitholder	12	1	827.9050	12,95
13 pc. OPTI-LINE bit set	PH (Phillips) : 1 - 2 - 3 PZ (Pozi) : 1 - 2 - 3 SL (Slot) : 0,6 - 0,8 - 1,2 T (Torx®) : 15 - 20 - 25 1x Quick-Lock bitholder	12	1	827.9051	12,95
13 pc. OPTI-LINE bit set	T (Torx®) : 1x T10 - 2x T15 - 3x T20 - 3x T25 - 2x T30 - 1x T40 1x Quick-Lock bitholder	12	1	827.9052	12,95
13 pc. OPTI-LINE bit set	PH (Phillips) : 1x PH 1 - 4x PH 2 - 1x PH 3 PZ (Pozi) : 1x PZ 1 - 4x PZ 2 - 1x PZ 3 1x Quick-Lock bitholder	12	1	827.9053	12,95

OPTI-LINE Bit-display PH-PZ-T-SL-SW

Execution: Complete module for wall shelves with 1/4" OPTI-LINE screw driving bits, bit sets and bit holders.



Type	Quantity	Packaging	Content	pcs/PU	Item no.	€ / PU
Bit '827' 1/4" C6.3 PH	15		5x PH 1, PH2 and PH3 (25mm)	1	827.9900	495,00
Bit '827' 1/4" C6.3 PZ	15		5x PZ 1, PZ2 and PZ3 (25mm)			
Bit '827' 1/4" C6.3 T	30		5x T10, T15, T20, T25, T30 and T40 (25mm)			
Bit '827' 1/4" C6.3 SL	15		5x SL 0,6x4,5, SL 0,8x5,5 and SL 1,2x6,5 (25mm)			
Bit '827' 1/4" C6.3 SW	15		5x SW 3, SW 4 and SW 5 (25mm)			
Bit '828' 1/4" E6.3 PH	15		5x PH 1, PH2 and PH3 (50mm)			
Bit '828' 1/4" E6.3 PZ	15		5x PZ 1, PZ2 and PZ3 (50mm)			
Bit '828' 1/4" E6.3 T	30		5x T10, T15, T20, T25, T30 and T40 (50mm)			
Bit set '827' 1/4" C6.3 PH-PZ-T	3		12x Bits (25mm), 1x bit holder			
Bi tset '827' 1/4"C6.3 PH-PZ-SL-T	3		12x Bits (25mm), 1x bit holder			
Bi tset '827' 1/4"C6.3 T	3		12x Bits (25mm), 1x bit holder			
Bit holder '827' 1/4" E6.3	9		1x Magnetic bit holder with quick-change			



827.9100



827.9110



827.9115



Description	Content	pcs/PU	Item no.	€ / PU
31 pc OPTI-LINE bit set	PH (Phillips) : 2x PH 1, 3x PH 2 and 1x PH 3 PZ (Pozi) : 2x PZ 1, 8x PZ 2 and 2x PZ 3 T (Torx) : 1x T 10, 2x T 15, 2x T 20, 3x T 25, 3x T 30 and 1x T 40 1x Magnetic quick-lock bit holder	1	827.9100	21,83
30 pc OPTI-LINE bit and sockets set	PH (Phillips) : 1x PH 1, PH 2 and PH 3 PZ (Pozi) : 1x PZ 1, 4x PZ 2, 1x PZ 3 T (Torx) : 1x T 10, T 15, T 20, T 25, T 30 and T 40 HEX (Inbus) : 1x 3, 4 and 5mm Sockets : 1x SW 6, 7, 8, 9, 10, 11, 12, 13 and 14 1x extension 1x adapter 1x ratchet	1	827.9110	27,30
17 pc OPTI-LINE Screw driving/Removal bit set	PH (Phillips) : 1x PH 1, PH 2 and PH 3 PZ (Pozi) : 1x PZ 1, PZ 2 and PZ 3 T (Torx) : 1x T 10, T 15, T 20, T 25, T 30 and T 40 4x screw removal bit 1x quick-lock bitholder	1	827.9115	36,84

OPTI-LINE Bit-set 34 pcs.



827.9200



827.9205

NEW



827.9200




827.9205



Description	Content	📦	pcs/PU	Item no.	€ / PU
34 pcs OPTI-LINE Bit-set	PH (Phillips) : 2x PH1, 4x PH2 and 2x PH3 PZ (Pozi) : 2x PZ1, 4x PZ2 and 2x PZ3 T (Torx®) : 2x T10, 2x T15, 4x T20, 4x T25, 1x T27, 2x T30 and 2x T40 1x OPTI-LINE Impact bitholder	10	1	827.9200	20,19
34 pcs OPTI-LINE Bit-set	PH (Phillips) : 1x PH1, 2x PH2 and 1x PH3 PZ (Pozi) : 1x PZ1, 2x PZ2 and 1x PZ3 SL (Slot) : 1x SL3, 1x SL4, 1x SL5,5 and 1x SL6,5 T (Torx®) : 1x T10, 1x T15, 2x T20, 2x T25, 1x T30 and 1x T40 TT (Torx Tamper) : 1x TT10, 1xTT15, 1x TT20, 1x TT25, 1x TT27, 1x TT30 and 1x TT40 SQD (Robertson) : 1x SQD2 HEX (Inbus) : 1x HEX2,5, 1x HEX3, 1x HEX4, 1x HEX5 and 1x HEX6 1x OPTI-LINE Impact bitholder	10	1	827.9205	20,74

OPTI-LINE Screw removal bit, in EV-pack



NEW



OPTI

Execution: OPTI-LINE Screw removal bit with hex shank.

Application: For removing damaged and overturned screws in 2 simple steps without damaging the surrounding surface.

Nr.	d (min-max)	l ₁	pcs/PU	Item no.	€ / PU
1	3,0 - 4,0	50	1	827.9601	8,50
2	4,0 - 5,0	50	1	827.9602	8,50
3	5,0 - 6,5	50	1	827.9603	8,50
4	6,5 - 10	50	1	827.9604	8,50

OPTI-LINE Screw removal bit set



OPTI

Execution: OPTI-LINE Screw removal bit set with hex shank.


Application: For removing damaged and overturned screws in 2 simple steps without damaging the surrounding surface.

Description	Content	pcs/PU	Item no.	€ / PU
17 pc OPTI-LINE Screw driving/Removal bit set	PH (Phillips) : 1x PH 1, PH 2 and PH 3 PZ (Pozi) : 1x PZ 1, PZ 2 and PZ 3 T (Torx) : 1x T 10, T 15, T 20, T 25, T 30 and T 40 4x screw removal bit 1x quick-lock bitholder	1	827.9115	36,84

878

Hex-key (Allen key), short

ROTEC®



Execution: Blued hex-keys (Allen keys). Short types, metric sizes, according to ISO 2936 (DIN 911).

Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
SW 1,5	44	Blued	1	878.0015	0,84
SW 2,5	55	Blued	1	878.0025	0,43
SW 3	63	Blued	1	878.0030	0,29
SW 4	70	Blued	1	878.0040	0,67
SW 5	80	Blued	1	878.0050	0,86
SW 6	90	Blued	1	878.0060	1,31
SW 7	95	Blued	1	878.0070	0,91
SW 8	100	Blued	1	878.0080	1,01
SW 9	105	Blued	1	878.0090	1,61
SW 10	112	Blued	1	878.0100	1,91

Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
SW 11	118	Blued	1	878.0110	2,51
SW 12	125	Blued	1	878.0120	2,77
SW 14	140	Blued	1	878.0140	4,58
SW 17	160	Blued	1	878.0170	8,14
SW 19	180	Blued	1	878.0190	12,26
SW 22	200	Blued	1	878.0220	20,03
SW 24	224	Blued	1	878.0240	25,31
SW 27	255	Blued	1	878.0270	35,17
SW 32	315	Blued	1	878.0320	60,01
SW 36	355	Blued	1	878.0360	86,19

Hex-key (Allen key) set, short

ROTEC®



Execution: Handy set nickel plated hex-keys (Allen keys) in a compact holder. Short types, metric sizes, according to ISO 2936 (DIN 911).

Description	Content	pcs/PU	Item no.	€ / PU
9 pc Allen-key set	1x 1½, 2, 2½, 3, 4, 5, 6, 8 and 10mm	1	878.4003	12,20

Hex-key (Allen key) set, short (imperial)

ROTEC®



Execution: Handy set nickel plated hex-keys (Allen keys) in a compact holder. Short types, imperial sizes, according to ISO 2936 (DIN 911).

Description	Content	pcs/PU	Item no.	€ / PU
10 pc Allen-key set (imperial)	1x 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8"	1	878.9006	11,16

880

Hex-key (Allen key) set, long

ROTEC®



Execution: Handy set nickel plated hex-keys (Allen keys) in a compact holder. Long types, metric sizes, according to ISO 2936 L (DIN 911 L).

Description	Content	pcs/PU	Item no.	€ / PU
9 pc Allen-key set, long	1x 1½, 2, 2½, 3, 4, 5, 6, 8 en 10mm	1	880.4003	16,13

882

Hex-key (Allen key), ball end, long

ROTEC®

Execution: Nickel plated hex-keys (Allen keys), long side with ball end. Long types, metric sizes, according to ISO 2936 L (DIN 911 L).



Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
SW 1,5	90	Nickel plated	1	882.0015	1,17
SW 2	100	Nickel plated	1	882.0020	1,22
SW 2,5	112	Nickel plated	1	882.0025	1,28
SW 3	126	Nickel plated	1	882.0030	1,39
SW 4	140	Nickel plated	1	882.0040	1,86
SW 5	160	Nickel plated	1	882.0050	2,08
SW 6	180	Nickel plated	1	882.0060	2,68

Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
SW 7	190	Nickel plated	1	882.0070	3,47
SW 8	200	Nickel plated	1	882.0080	4,47
SW 10	224	Nickel plated	1	882.0100	6,28
SW 12	250	Nickel plated	1	882.0120	10,20
SW 14	280	Nickel plated	1	882.0140	14,40
SW 17	320	Nickel plated	1	882.0170	24,52
SW 19	360	Nickel plated	1	882.0190	34,05

Hex-key (Allen key) set , ball end, long

ROTEC®

Execution: Handy set nickel plated hex-keys (Allen keys) in a compact holder. Long types, ball end, metric sizes, according to ISO 2936 (DIN 911).



Description	Content	pcs/PU	Item no.	€ / PU
9 pc Allen-key set, ball end, long	1x 1½, 2, 2½, 3, 4, 5, 6, 8 and 10mm	1	882.4003	24,16

Hex-key (Allen key), ball end, long (imperial)

ROTEC®

Execution: Nickel plated hex-keys (Allen keys), long side with ball end. Long types, imperial sizes, according to BS 2470



Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
SW 1/16	90	Nickel plated	1	882.5001	1,28
SW 5/64	100	Nickel plated	1	882.5005	1,33
SW 3/32	112	Nickel plated	1	882.5007	1,44
SW 7/64	126	Nickel plated	1	882.5009	1,48
SW 1/8	126	Nickel plated	1	882.5011	2,08
SW 5/32	140	Nickel plated	1	882.5015	2,23
SW 3/16	160	Nickel plated	1	882.5017	2,77

Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
SW 7/32	170	Nickel plated	1	882.5019	3,78
SW 1/4	180	Nickel plated	1	882.5021	4,43
SW 9/32	190	Nickel plated	1	882.5022	6,82
SW 5/16	200	Nickel plated	1	882.5023	10,13
SW 3/8	224	Nickel plated	1	882.5025	15,67
SW 1/2	250	Nickel plated	1	882.5029	26,69
SW 9/16	280	Nickel plated	1	882.5031	37,15

Hex-key (Allen key) set, ball end, long (imperial)

ROTEC®

Execution: Handy set nickel plated hex-keys (Allen keys) in a compact holder. Long types, ball end, imperial sizes, according to BS 2470.



Description	Content	pcs/PU	Item no.	€ / PU
10 pc Allen-key set, ball end, long (imperial)	1x 1/16", 5/64", 3/32", 1/8", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8"	1	882.9006	31,34

890

Torx-key, long

Execution: Nickel plated torx-keys, long types.



Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
T 5	84	Nickel plated	1	890.2005	3,84
T 6	84	Nickel plated	1	890.2006	3,62
T 7	96	Nickel plated	1	890.2007	3,62
T 8	96	Nickel plated	1	890.2008	3,62
T 9	96	Nickel plated	1	890.2009	3,62
T 10	100	Nickel plated	1	890.2010	3,62
T 15	108	Nickel plated	1	890.2015	3,78
T 20	114	Nickel plated	1	890.2020	3,89

Type	l ₁	Surface	pcs/PU	Item no.	€ / PU
T 25	126	Nickel plated	1	890.2025	4,06
T 27	134	Nickel plated	1	890.2027	4,15
T 30	140	Nickel plated	1	890.2030	4,43
T 40	152	Nickel plated	1	890.2040	5,05
T 45	170	Nickel plated	1	890.2045	7,79
T 50	190	Nickel plated	1	890.2050	8,18
T 55	216	Nickel plated	1	890.2055	10,28
T 60	240	Nickel plated	1	890.2060	14,28

Torx-key set, long

Execution: Handy set nickel plated torx-keys in a compact holder. Long types.



Description	Content	pcs/PU	Item no.	€ / PU
8 pc Torx-key set, long	1x T 9, T 10, T 15, T 20, T 25, T 27, T 30 and T 40	1	890.1002	32,03

Torx-key set, short

Execution: Handy set nickel plated torx-keys in a compact holder. Short types.



Description	Content	pcs/PU	Item no.	€ / PU
8 pc Torx-key set, short	1x T 9, T 10, T 15, T 20, T 25, T 27, T 30 and T 40	1	890.1001	24,96

Torx-key set, ball end, long


Execution: Handy set nickel plated torx-keys in a compact holder. Long types with ball end.



Description	Content	pcs/PU	Item no.	€ / PU
8 pc Torx-key set, ball end, long	1x T 9, T 10, T 15, T 20, T 25, T 27, T 30 and T 40	1	890.5001	40,66

842

Impact socket 1/2" short



Execution: According to DIN 3129, ISO 2725-2, internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 10	40	17	1/2"	1	842.0010	5,26
SW 12	40	19	1/2"	1	842.0012	5,26
SW 13	40	20	1/2"	1	842.0013	4,81
SW 14	40	22	1/2"	1	842.0014	6,87
SW 15	40	23	1/2"	1	842.0015	5,64
SW 16	40	24	1/2"	1	842.0016	6,45
SW 17	40	26	1/2"	1	842.0017	5,72
SW 18	40	27	1/2"	1	842.0018	6,45
SW 19	40	28	1/2"	1	842.0019	5,64
SW 21	40	30	1/2"	1	842.0021	5,61

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 22	40	32	1/2"	1	842.0022	7,71
SW 24	40	34	1/2"	1	842.0024	6,63
SW 27	40	38	1/2"	1	842.0027	9,27
SW 28	40	38	1/2"	1	842.0028	13,11
SW 30	40	42	1/2"	1	842.0030	11,13
SW 32	40	44	1/2"	1	842.0032	11,63
SW 36	50	50	1/2"	1	842.0036	17,16
SW 41	55	56	1/2"	1	842.0041	29,89
SW 46	60	62	1/2"	1	842.0046	42,71

Impact socket 1/2" long



Execution: Internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 10	80	17	1/2"	1	842.1010	9,61
SW 12	80	19	1/2"	1	842.1012	9,61
SW 13	80	20	1/2"	1	842.1013	7,78
SW 14	80	22	1/2"	1	842.1014	9,45
SW 15	80	23	1/2"	1	842.1015	9,24
SW 16	80	24	1/2"	1	842.1016	10,44
SW 17	80	26	1/2"	1	842.1017	9,07
SW 18	80	27	1/2"	1	842.1018	10,68
SW 19	80	28	1/2"	1	842.1019	8,80

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 21	80	30	1/2"	1	842.1021	11,13
SW 22	80	32	1/2"	1	842.1022	11,63
SW 24	80	34	1/2"	1	842.1024	10,88
SW 27	80	38	1/2"	1	842.1027	16,32
SW 28	80	40	1/2"	1	842.1028	16,02
SW 30	80	42	1/2"	1	842.1030	19,80
SW 32	80	44	1/2"	1	842.1032	20,02
SW 36	80	50	1/2"	1	842.1036	21,82

Adapter 1/2"



Execution: Internal square drive according to DIN 3121, ISO 1174.

A ₁	A ₂	pcs/PU	Item no.	€ / PU
1/2"	3/4"	1	842.9001	30,12

Extension 1/2"



Execution: Internal square drive according to DIN 3121, ISO 1174.

A ₁	l ₁	pcs/PU	Item no.	€ / PU
1/2"	125	1	842.9100	22,58
1/2"	175	1	842.9101	25,78
1/2"	250	1	842.9102	28,37

Locking pin for 1/2" sockets



Description	pcs/PU	Item no.	€ / PU
Locking pin 1/2"	10	842.9200	35,09


Cardan joint for 1/2" sockets



A ₁	A ₂	pcs/PU	Item no.	€ / PU
1/2"	1/2"	1	842.9400	22,23

843

Impact socket 3/4" short




Execution: According to DIN 3129, ISO 2725-2, internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 17	50	30	3/4"	1	843.0017	20,13
SW 19	50	32	3/4"	1	843.0019	20,13
SW 21	50	35	3/4"	1	843.0021	20,13
SW 22	50	36	3/4"	1	843.0022	20,13
SW 24	50	38	3/4"	1	843.0024	20,13
SW 27	52	42	3/4"	1	843.0027	20,13
SW 30	52	46	3/4"	1	843.0030	20,60

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 32	56	46	3/4"	1	843.0032	20,60
SW 36	58	52	3/4"	1	843.0036	25,47
SW 41	60	58	3/4"	1	843.0041	33,09
SW 46	64	67	3/4"	1	843.0046	36,46
SW 50	70	70	3/4"	1	843.0050	45,14
SW 55	75	78	3/4"	1	843.0055	59,19

Impact socket 3/4" long



Execution: Internal square drive according to DIN 3121, ISO 1174.

Application: Suited for use on all commonly used pneumatic and electric machines.

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 17	90	30	3/4"	1	843.1017	25,78
SW 19	90	32	3/4"	1	843.1019	25,78
SW 21	90	35	3/4"	1	843.1021	25,78
SW 22	90	36	3/4"	1	843.1022	25,78
SW 24	90	38	3/4"	1	843.1024	25,78
SW 27	90	38	3/4"	1	843.1027	27,60
SW 30	90	46	3/4"	1	843.1030	29,13

K ₁	l ₁	D (mm)	K ₂	pcs/PU	Item no.	€ / PU
SW 32	90	48	3/4"	1	843.1032	30,97
SW 36	90	54	3/4"	1	843.1036	36,46
SW 41	90	60	3/4"	1	843.1041	54,30
SW 46	90	67	3/4"	1	843.1046	60,25
SW 50	90	70	3/4"	1	843.1050	76,73
SW 55	100	78	3/4"	1	843.1055	104,95
SW 60	100	85	3/4"	1	843.1060	100,53

Adapter 3/4"



Execution: Internal square drive according to DIN 3121, ISO 1174.

A ₁	A ₂	pcs/PU	Item no.	€ / PU
3/4"	1/2"	1	843.9000	25,16
3/4"	1"	1	843.9001	28,22

Extension 3/4"



Execution: Internal square drive according to DIN 3121, ISO 1174.

A ₁	l ₁	pcs/PU	Item no.	€ / PU
3/4"	75	1	843.9100	33,56
3/4"	100	1	843.9101	39,51
3/4"	175	1	843.9102	45,46
3/4"	200	1	843.9103	45,46
3/4"	250	1	843.9104	48,35
3/4"	325	1	843.9105	75,21

Locking pin for 3/4" sockets



Description	pcs/PU	Item no.	€ / PU
Locking pin 3/4"	10	843.9200	48,05